


SPECIFICATIONS

Current Rating: 2 Amps
 Contact Material: Copper Alloy
 Contact Resistance: 20mΩ Max.
 Insulation Material: Polyester, UI94V-0, Nylon 6T
 Insulation Resistance: 1000MΩ Min.
 Withstanding: 500V AC
 Operating Temp: -40°C to +105°C

Recommended
 P.C.Board
 Hole Layout

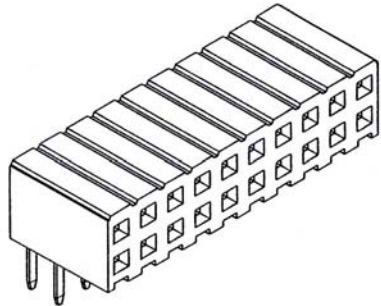

Series	Rows	Profile	Contacts	Tail Length	Plating
BRS	04	HPD	XX	A	XX
2mm Receptacle Strip	04=2 rows R/A	HPD=7.2mm HPA=6.7mm	02-40	A=2.55mm B=2.8mm Others available	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank, 10,15,30 u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/15/02
				Checked	Lizzy	02/15/02
				Drawn	Tina	02/15/02
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-04-HPD-XX-A-XX**

Description: Female Header, Side Entry, Right Angle Type