




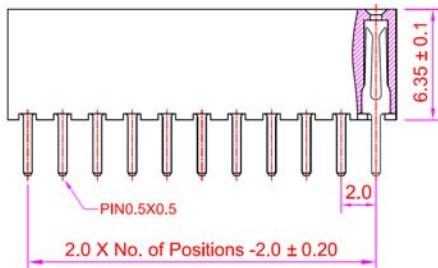

**Recommended  
P.C. Board Hole Layout**



**SPECIFICATIONS**

Current Rating: 2 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Contact Resistance: 20mΩ max.  
 Withstanding: AC 500V  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL94V-0 Nylon-6T  
 Contact Plating: Gold Flash (std)  
 Operating Temp: -40C ~ +105C

Series	Rows	Profile	Contacts	Tal Length	Plating
BRS	05	HPW	XX	X	XX
2mm Receptacle Strip	05=3 Rows	6.35mm High 6.0mm Wide	06-120	A=2.3mm (std) B=3.0mm	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank 10,15,30u"

**RoHS compliant**

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	4/16/03
				Checked	Lizzy	4/16/03
				Drawn	Tina	4/16/03
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-05-HPW-XX-A-XX**

Description: Female Header P: 2.0mm x 2.0mm  
 6.35mm profile, triple row, straight type