



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

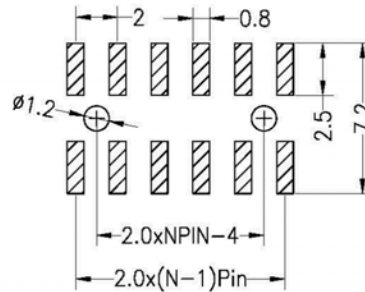

SPECIFICATIONS

Rated Current: 1.5 Amp
 Contact Resistance: 20mΩ Max
 Withstanding: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Contact Material: Brass
 Contact Plating: Au or Sn over Ni
 Insulator Material: Polyester UL94V-0
 Standard: PA6T
 Max. Processing: 230C for 30-60 seconds
 260C for 10 seconds
 Operating Temp: -40C to +105C

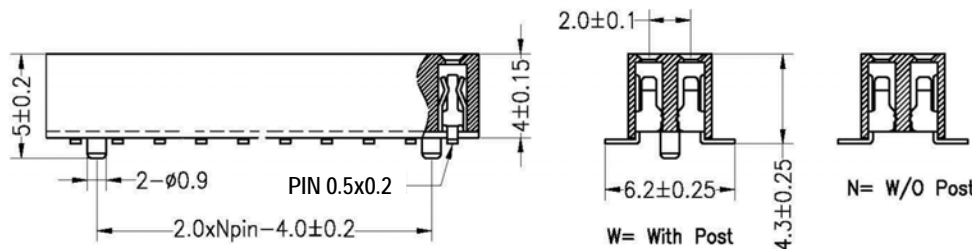

Series	Rows	Profile	Contacts	Plating	Options
BRS-AL	0X	XXX	XX	XX	XX
2mm Custom Receptacle strip	01=Single 02=Dual	[Blank]=4.3mm (std)	Single row 2-40 Dual row 4-80	TN=Tin SG=Selective Gold GDXX=Gold XX=flash if blank, 5, 10, 15, 30u"	[blank]=None SM=Surface Mount CP=Centering Post

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	07/23/12
				Checked	Lizzy	07/23/12
				Drawn	Tina	07/23/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **BRS-AL-02-XXX-XX-XX-SM**
 Description: Receptacle strip, double row, .079" (2.00mm) pitch, top entry, 0.5mm custom tail pin width