
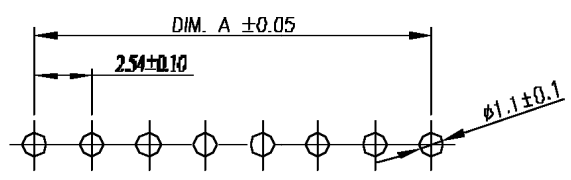


SPECIFICATIONS

Current Rating: 2.5A max.
 Voltage Rating: 250V AC max.
 Insulation Resistance: 500K Megohms Min.
 Contact Resistance: 20 Milliohms Max.
 Withstanding: 1500V AV
 Temperature: 0°C to +75°C
 Contact Material: Brass
 Housing Material: Nylon66, UL 94V-2(white_)
 Plating Material: Under=Nickel Plating for all 50u" Min.
 Solder Tail= Tin Plating 100u" ~ 200u"

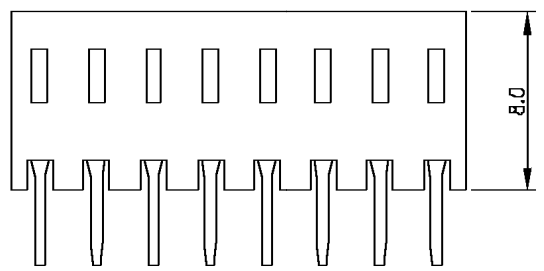

P.C.B LAYOUT

Dimensions					
Item	A (mm)	B (mm)	Item	A (mm)	B (mm)
02	2.54	5.10	16	38.10	40.66
03	5.08	7.64	17	40.64	43.20
04	7.62	10.18	18	43.18	45.74
05	10.16	12.72	19	45.72	48.28
06	12.70	15.26	20	48.26	50.82
07	15.24	17.80	21	50.80	53.36
08	17.78	20.34	22	53.34	55.90
09	20.32	22.88	23	55.88	58.44
10	22.86	25.42	24	58.42	60.98
11	25.40	27.96	25	60.96	63.52
12	27.94	30.50	26	63.50	66.06
13	30.48	33.04	27	66.04	68.60
14	33.02	35.58	28	68.58	71.14
15	35.56	38.12	29	71.12	73.68

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	03/13/08
				Checked	Lizzy	03/13/08
				Drawn	Tina	03/13/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CBH-A-XX**

Description: 2.54mm P.C.B. Conn. Top Entry