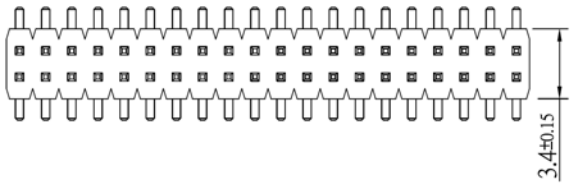

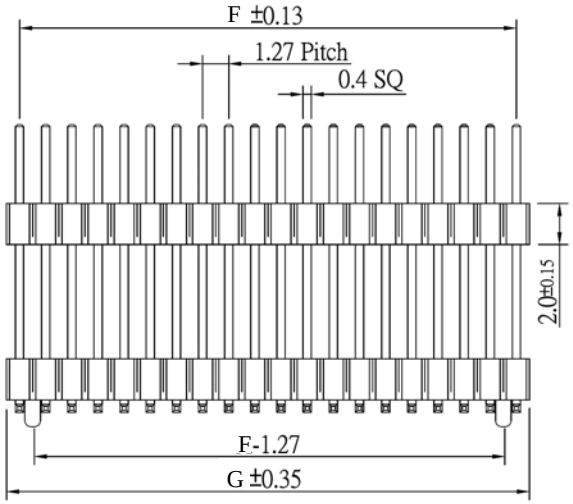

F=1.27*(No. of Positions Per Row-1)
G =A+1.27±0.3

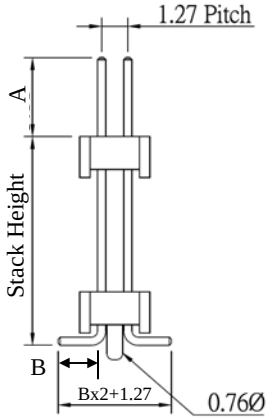

E=Total Pin Length

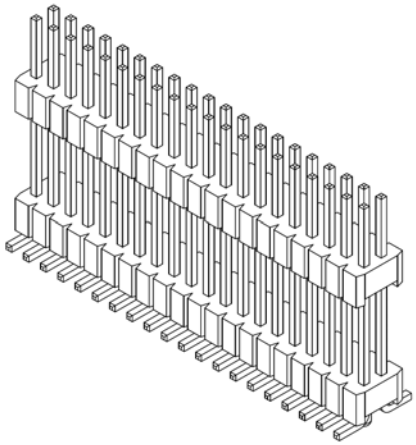

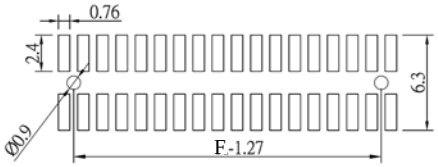

P.C.Board Layout

SPECIFICATIONS

Contact material:	Brass
Contact plating:	Gold flash over nickel
Insulator material:	Nylon 6T

Series	No. of Rows	Type	No. of Pins	Pin Length	Plating
CCDPH	X	XX	XX	(A/B/E)	XX
Pin header, DIP type, .40mm square pins	2=Dual rows 1=Single row	ST=Straight RA=Right angle SM=Surface mount	1-40 (single row) 2-80 (double row)	Customer specified pin length. See diagram for A, B and E dimensions	SGXX=Duplex TN=Tin GDXX=Gold XX=Flash if blank, 03, 05, 10, 15, 30µ”

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3’
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: CCDPH-2-SM-XX-(A/B/E)-XX-XX

Description: Pin header, 1.27x1.27, dual insulator, double row