



**SPECIFICATIONS**

Current rating: 3 amps  
 Voltage rating: 500V for 1 min.  
 Contact material: Phosphor bronze or brass  
 Contact resistance: 20 milliohms max.  
 Contact plating: Gold over nickel  
 Insulator material: PBT, 30% glass fiber UL94V-0  
 Insulation resistance: 5000 megohms min. at 500VDC  
 Temperature range: -40°C to +105°C

Circuit	Dimension				
	A	B	C	D	E
10	15.84	24.06	27.40	34.94	41.24
12	19.80	28.02	31.36	38.90	45.20
16	27.72	35.94	39.28	46.82	53.12
20	35.64	43.86	47.20	54.74	61.04
24	43.56	51.78	55.12	62.66	68.96
26	47.52	55.74	59.08	66.62	72.92
28	51.48	59.70	63.04	70.58	76.88
30	55.44	63.66	67.00	74.54	80.84
32	59.40	67.62	70.96	78.50	84.80
36	67.32	75.54	78.88	86.42	92.72
40	75.24	83.46	86.80	94.34	100.64
44	83.16	91.38	94.72	102.26	108.56
46	87.12	95.34	98.68	106.22	112.52
50	95.04	103.26	106.60	114.14	120.44
56	106.92	115.14	118.48	126.02	132.32
60	114.84	123.06	126.40	133.94	140.24
62	118.80	127.02	130.36	137.90	144.20
64	122.76	130.98	134.32	141.86	148.16
70	134.64	142.86	146.20	153.74	160.04
72	138.60	146.82	150.16	157.70	164.00
86	166.32	174.54	177.88	185.49	191.48

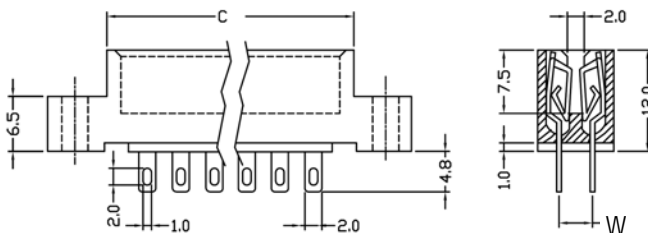

SOLDER TYPE

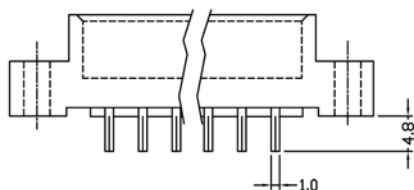

DIP TYPE

Available without mounting ears

Series	Type	Positions	Options
CCE-B	KSLX	XX	XX
3.96mm Pitch Card Edge Connector	KSLD=Dual Row Dip W=3.96 KSLE=Dual Row Dip W=5.08 KSLF=Solder Tab W=3.96 KSLG=Solder Tab W=5.08 KSLS=Single Row DIP KSLT=Single row solder tab	Dual Row 10-86 Single Row 5-43	Blank=w/ mounting ears NE=No ears

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	9/1/09	Greg	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCE-B-KSLX-XX-XX**

Description: Housing, double row, 3.96 pitch, mounting ears