



SPECIFICATIONS

Voltage rating: 500 volts
 Current rating: 3 amps
 Contact material: Phosphor bronze
 Contact plating: Gold over nickel
 Contact resistance: 20 milliohms max.
 Insulation resistance: 5,000 megohms min. at 500VDC
 Insulator material: PBT with 30% glass fiber, UL94V-0
 Operating temperature: -40°C to +105°C

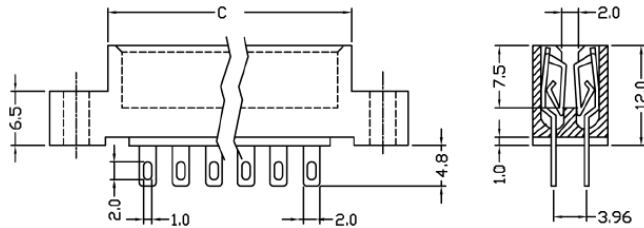

SOLDER TYPE

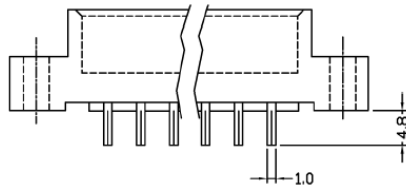

DIP TYPE

Circuit	Dimension					Circuit	Dimension				
	A	B	C	D	E		A	B	C	D	E
10	15.84	24.06	27.40	34.94	41.24	44	83.16	91.38	94.72	102.26	108.56
12	19.80	28.02	31.36	38.90	45.20	46	87.12	95.34	98.68	106.22	112.52
16	27.72	35.94	39.28	46.82	53.12	50	95.04	103.26	106.60	114.14	120.44
20	35.64	43.86	47.20	54.74	61.04	56	106.92	115.14	118.48	126.02	132.32
24	43.56	51.78	55.12	62.66	68.96	60	114.84	123.06	126.40	133.94	140.24
26	47.52	55.74	59.08	66.62	72.92	62	118.80	127.02	130.36	137.90	144.20
28	51.48	59.70	63.04	70.58	76.88	64	122.76	130.98	134.32	141.86	148.16
30	55.44	63.66	67.00	74.54	80.84	70	134.64	142.86	146.20	153.74	160.04
32	59.40	67.62	70.96	78.50	84.80	72	138.60	146.82	150.16	157.70	164.00
36	67.32	75.54	78.88	86.42	92.72	86	166.32	174.54	177.88	185.49	191.48
40	75.24	83.46	86.80	94.34	100.64						

Series	Positions	Type	Plating	Mounting Options
CCE-B	XX	X	GD	XXX
3.96mm pitch card edge connector	See table	A=Solder type B=DIP type	GD=Gold	MER=With mounting ears [blank]=Without mounting ears

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/11/06
				Checked	Lizzy	05/11/06
				Drawn	Tina	05/11/06
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCE-B-XX-X-GD-XXX**

Description: Card edge connector, 3.96mm pitch, with mounting ears