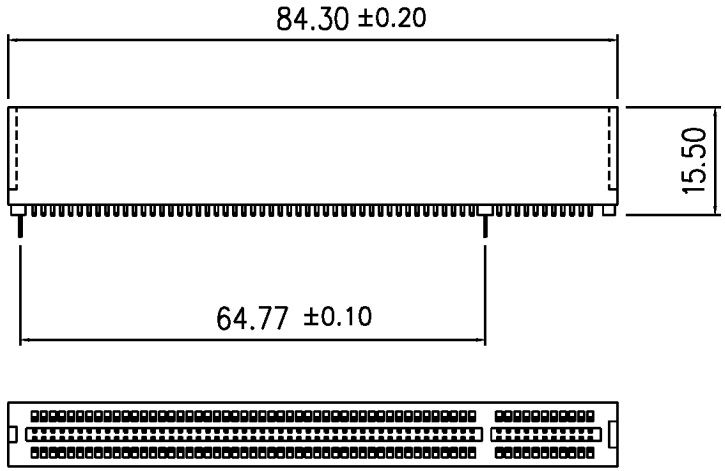



SPECIFICATIONS

Contact material:	Copper alloy
Contact resistance:	30 milliohms max.
Contact plating:	Gold or gold flash
Insulator material:	PPS, UL94V-0
Insulation resistance:	5,000 megohms min.
Withstanding:	500VAC for 1 min.
Insertion force:	130g max.
Retention force:	40g min.
Operating temperature:	-40°C to +105°C

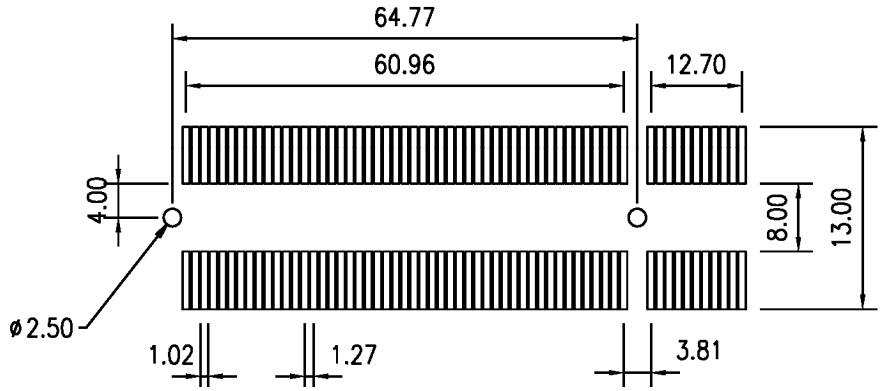

Recommended PC Board Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCE-PCI-120SMT-120-SG**

Description: PCI card edge connector, SMT type, 120 pins