


SPECIFICATIONS

Current Rating: 3 Amp
 Contact Material: Copper, Gold over Nickel in Mating Area
 Tin over Nickel in Solder Area, Green
 Contact Resistance: 20 Milli Ohms Max.
 Insulation Material: Glass Reinforced Thermoplastic UL94V-0
 Insulation Resistance: 5000 Meg. Ohms Min. at 500 VDC
 Insertion Force: 340 grams max per contact pair
 Withdrawal Force: 28 grams min per contact pair
 Withstanding: 1000 VAC RMS
 Operating Temperature: -55°C to +85°C

Dimensions					
Pin.	A	B	C	D	E
10	35.02	27.30	29.82	15.42	10.16
30	60.42	52.70	45.22	40.82	35.56

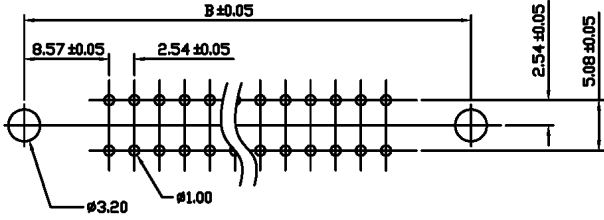

RECOMMENDED PCB LAYOUT

RoHS compliant


Series	Type	Positions	Mounting	Options
CCE	SCD	XX	XX	XX
Card edge connector	SCD type	10,30	ST=Straight RA=Right angle SD=Straddle tail	[blank]=Mounting ears NE=No ears

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/11/07
				Checked	Lizzy	09/11/07
				Drawn	Tina	09/11/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCE-SDC-XX-ST-XX**

Description: Card edge connector



UNIT: mm