


1 2 3 4 5 6 7 8 9

A

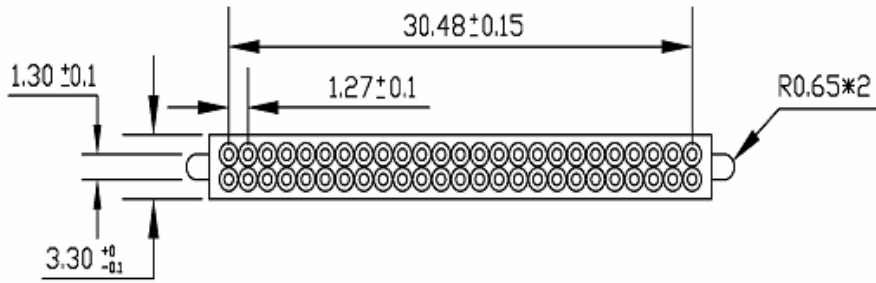

SPECIFICATIONS

Current rating: 0.5 amps
 Contact material: Beryllium copper
 Titanium copper plating over 30µ" (0.76µm) nickel
 Wiping area: 5µ" (0.126µm) gold
 Solder tails: 100µ" (2.54µm)
 Insulation material: Glass filled LCP, black, UL 94V-0
 Insulation resistance: 1x10⁹ohm at 500VDC max.
 1x10⁸ohm at 500VDC max.
 after environmental conditioning
 Withstanding: 500VRMS at sea level
 Operating temperature: -10°C to +70°C



A

B

B

C

C

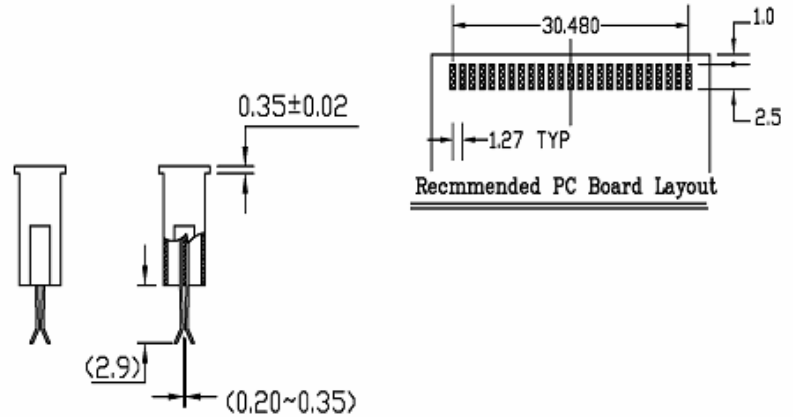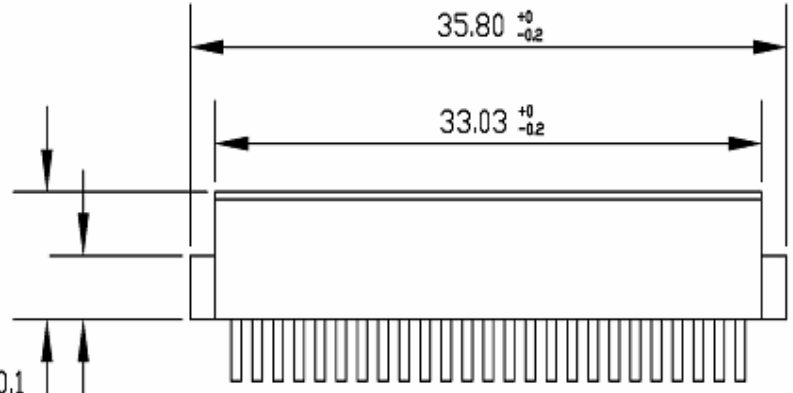

E

E

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCF-04000-225-SGXX**

Description: 50 position female PC card receptacle

G

G

1 2 3 4 5 6 7 8 9