
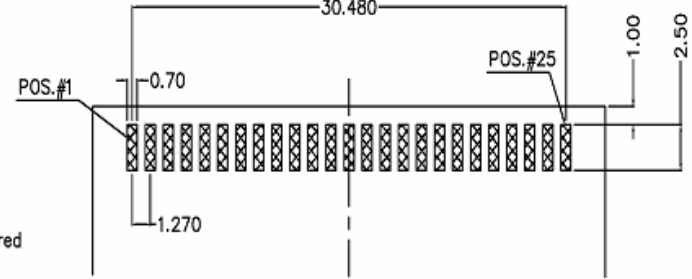
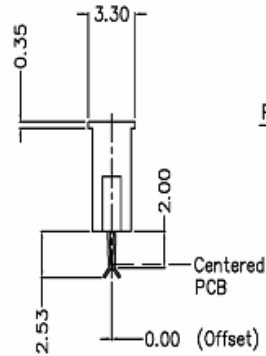
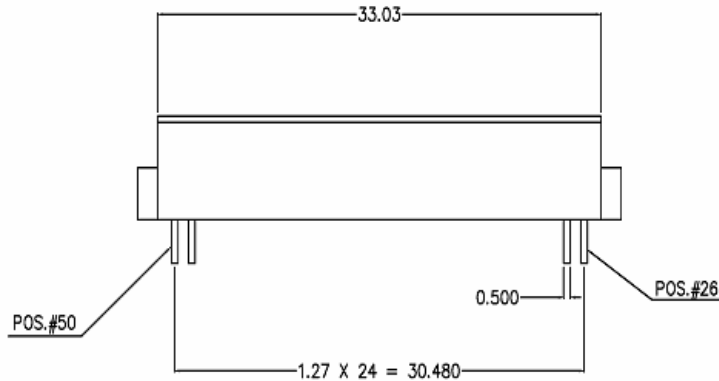


**SPECIFICATIONS**

Current Rating: 0.5 amps  
 Contact Material: Beryllium copper  
 Titanium copper plating over 30µ" (0.76µm) nickel  
 Wiping Area: 5µ" (0.126µm) gold  
 Solder Tails: 100µ" (2.54µm)  
 Insulation Material: Glass filled LCP, black, UL 94V-0  
 Insulation Resistance: 1x10<sup>9</sup>ohm at 500VDC max.  
 1x10<sup>8</sup>ohm at 500VDC max.  
 after environmental conditioning  
 Withstanding: 500VRMS at sea level  
 Temperature: -10°C to +70°C

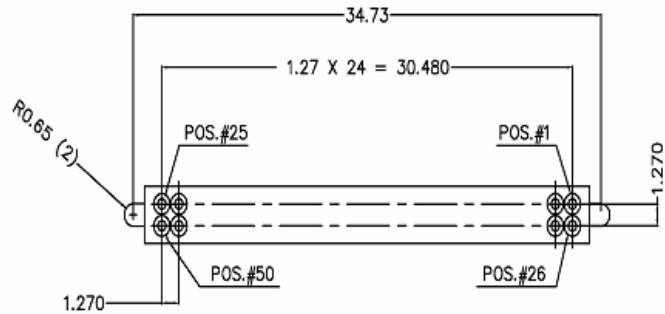

Recommend PCB Layout

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCF-06004-225-SGXX**

Description: 50 position female PC card receptacle