

SPECIFICATIONS

Current rating:	3 amps
Contact material:	Copper alloy
Contact plating:	Gold contacts, tin tails
Contact resistance:	20 milliohms max.
Insulator material:	Glass filled polyester, UL94V-0
Insulation resistance:	1,000 megohms min.
Withstanding:	600VAC for 1 min.
Operating temperature:	-40°C to +105°C

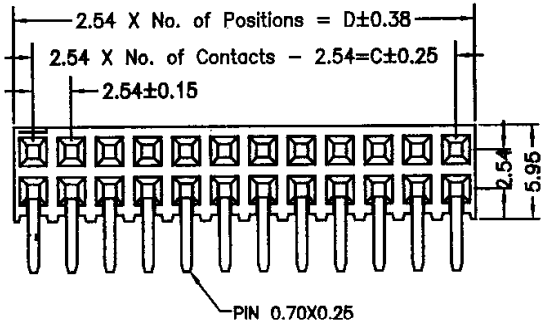

A TYPE



Recommended PC Board
Hole Layout



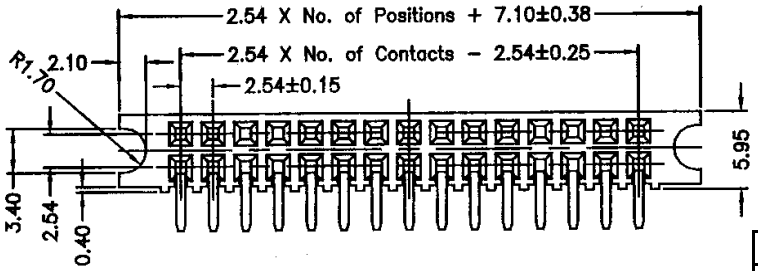

B TYPE

Series	Rows	Profile	Positions	Plating
ARS	02	SELPJX	XX	XX
Receptacle strip .100" pitch	01=Single 02=Dual	Side entry 8.1mm wide 5.95mm high X: Blank=A Type B=B Type	Single row: 2-40 Dual row: 4-80	TN=Tin GDXX=Gold XX=Flash if blank, 10, 15, 30u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: ARS-02-SELPJX-XX-XX

Description: Receptacle strip, .100" pitch, dual row, side entry