


SPECIFICATIONS
 Current Rating: 0.5 AMP
 Contact Material: Phosphor Bronze
 Contact Resistance: 30mΩ max. at DC 100mA
 Housing Material: High Temp. Plastic UL94V-0
 Insulation Resistance: 500MΩ min at DC 500V
 Leg Material: Brass
 Withstanding: AC 250V for 1 minute
 Operating Temp: -55°C ~ +105°C

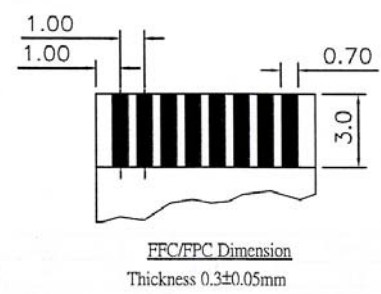

Series	Pitch	Type	Positions	Style	Plating	Packing
CCFC	100	2432	XX	X	TN	XX
FFC/FPC Non Zif	100=1.00mm	Type 2432	03-32	R=Right Angle V=Vertical SS=Side Entry Surface Mount	TN=Tin	Blank=Bulk TR=Tape & Reel TB=Tube

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	11/11/07
				Checked	Lizzy	11/11/07
				Drawn	Tina	11/11/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCFC-100-2432-XX-SS-TN**

Description: FFC/FPC Connector 1.0mm Non ZIF