


**SPECIFICATIONS**

Current rating: 5A AC/DC  
 Voltage rating: 250 V AC/DC  
 Contact Resist.: 10 mΩ max.  
 Insulating Resist.: 100 mΩ min.  
 Withstanding: 1500 VAC min.  
 Operating Temp.: .25°C to +85°C

Dimensions mm		
Pos.	A	B
2	3.96	8.45
3	7.92	12.39
4	11.88	16.35
5	15.84	20.31
6	19.8	24.27
7	23.76	28.23
8	27.72	32.19
9	31.68	36.15
10	35.64	40.11
11	39.6	44.07
12	43.56	48.03
13	47.52	51.99
14	51.48	55.95
15	55.44	59.91
16	59.4	63.87
17	63.36	67.83
18	67.32	71.79
19	71.28	75.75
20	75.24	79.71

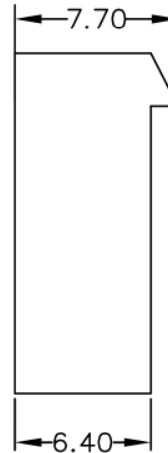

Series	Positions
CCHB	XX
3.96mm Crimp Housing	02 to 20

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/30/10
				Checked	Lizzy	08/30/10
				Drawn	Tina	08/30/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCHB-XX**

Description: 3.96mm Crimp Housing

