


SPECIFICATIONS

Turn Ratio: 1CT:1
 Inductance: 350uH Min
 Insertion Loss: -1.0dB (1-100MHz)
 Return Loss: -18dB (1-30MHz), -18dB (40MHz), -16dB (50MHz),
 -12dB (60-80MHz), -10dB(100MHz)
 Crosstalk: -45dB(30MHz), -40dB(60MHz), -35dB(100MHz)
 DCMR: -43dB(30MHz), -37dB(60MHz), -33dB(100MHz)
 HI-POT: 1500Vrma/0.5mA/2Sex
 Operating Temp: -40°C to +85°C

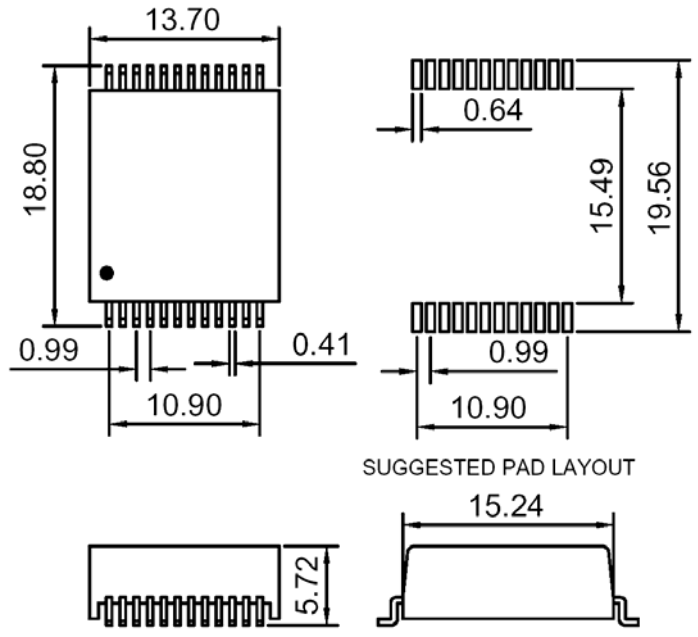

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	05/21/08
				Checked	Lizzy	05/21/08
				Drawn	Tina	05/21/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCM-30FB-23NL**

Description: 1000 Base-T Magnetic Module