



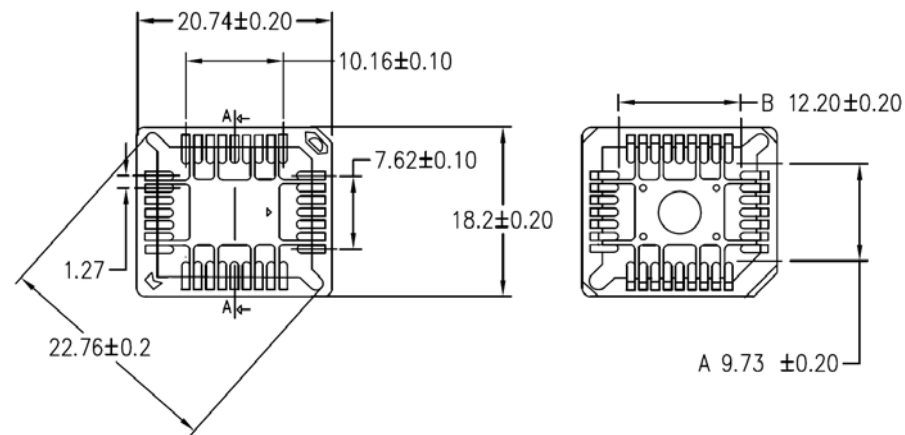


SPECIFICATIONS

Insulator Material:	PPS&40% Glass Fiber UL94V-0
Contact Resistance:	30m Ohm Max at DC 100mA
Current Rating:	1 Amp
Withstanding:	AC 500V for 1 minute
Contact Material:	Phosphor Bronze
Temperature Range:	-55C to +105C

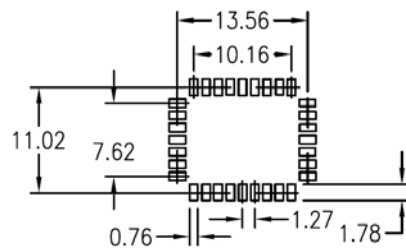

RENNMENDED P.C.B PAD LAYOUT



SECTION A-A

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date	 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919	
				Approved	Howard	09/14/14		
				Checked	Lizzy	09/14/14		
				Drawn	Tina	09/14/14		
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'	Part No.: CCSM-32-TN-TR	
				 	UNIT: mm		Description: PLCC SMT PPS 32Pin Tin	

