


**SPECIFICATIONS**  
 Contact resistance: 30 milliohms max.  
 Insulation resistance: 1000 megohms min.  
 Withstanding: 500 VAC/1 min.  
 Withdrawal force: 0.3 Kgf per contact pair  
 Operating temp.: -50°C to +105°C

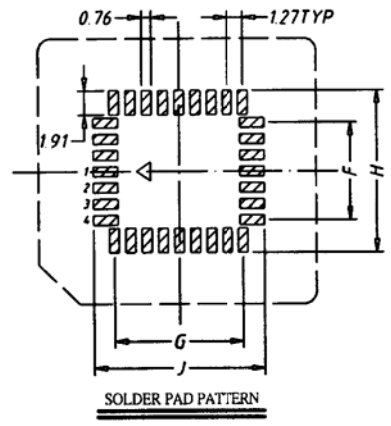

Dimensions									
Positions	A	B	C	D	E	F	G	H	J
20	15.65	15.65	9.45	9.45	17.28	5.08	5.08	10.03	10.03
28	18.19	18.19	12.00	12.00	20.87	7.62	7.62	12.57	12.57
32	20.73	18.19	14.63	12.09	22.60	7.62	10.16	12.80	13.56
44	23.27	23.27	17.17	17.17	28.15	12.70	12.70	17.65	17.65
52	25.81	25.81	19.65	19.65	31.65	15.24	15.24	20.19	20.19
68	30.89	30.89	24.60	24.60	39.15	20.32	20.32	25.27	25.27
84	35.97	35.97	29.80	29.80	46.00	25.40	25.40	30.35	30.35

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCSM-XX-TN-HT**

Description: 44 position PLCC SMT, high temperature insulator