



84 Position

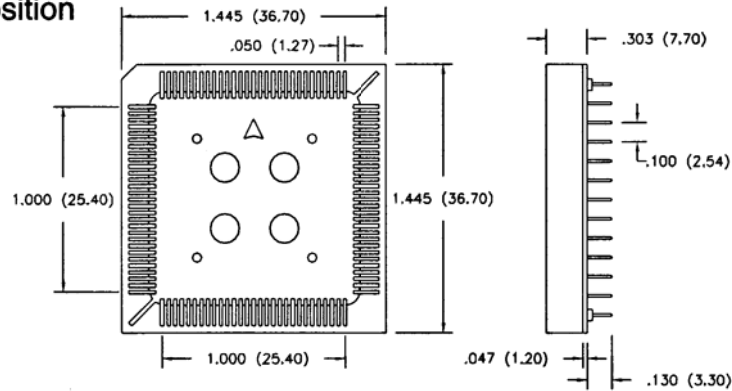

PC Board Layout

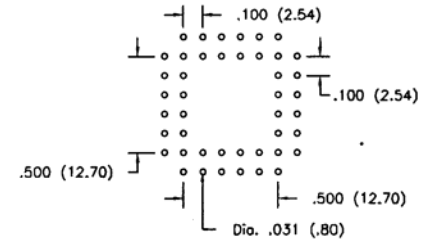


SPECIFICATIONS

Operating voltage: 250VAC max.
 Current rating: 1 amp
 Insulator: PBT glass reinforced UL94V-0
 Contacts: Phosphor bronze
 Contact plating: Bright tin over copper
 Optional gold plating available
 Contract resistance: 30 milliohms max.
 Insulator resistance: 1000 megohms min.
 Dielectric withstanding: 500 VAC min.
 Operating temperature: -55°C to +105°C

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/10/96
				Checked	Lizzy	04/10/96
				Drawn	Tina	04/10/96
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CCTH-84-XX**

Description: PLCC socket, 84 pin 0.050" pitch through hole version