



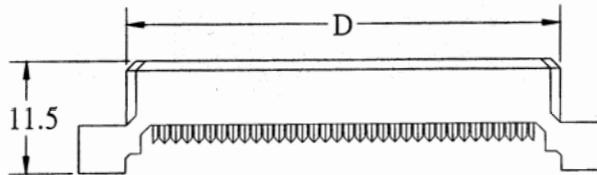



SPECIFICATIONS


Current rating: 1 amp
 Housing material: PBT, glass filled, UL94V-0
 Contact material: Phosphor bronze
 Contact resistance: 30 milliohms max.
 Insulation resistance: 3,000 megohms min.
 Withstanding: 500VAC/1 min.
 Operating temperature: -40°C to +105°C

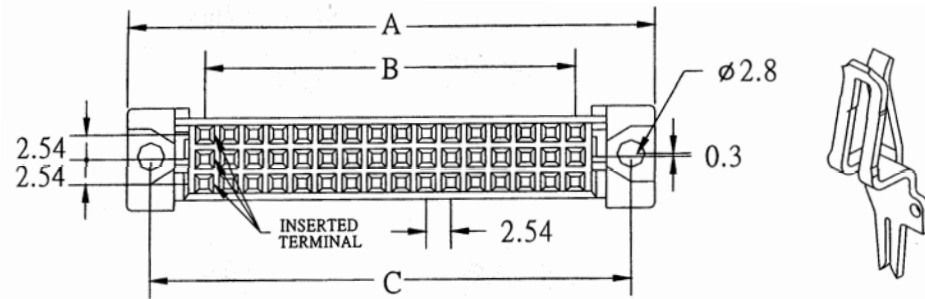

Dimensions				
Pos.	A	B	C	D
48	55.00	38.10	50.00	45.00
96	95.00	78.74	90.00	85.00

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		



Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CED-2-D-XX-B1-7-SG2-C**

Description: DIN 41612 connector, C type, female IDC, 96 pins