
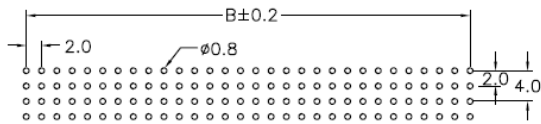



**SPECIFICATIONS**

Current Rating: 1 Amp  
 Insulation Resistance: 1000MΩ min ad DC 500V  
 Contact Resistance: 2mΩ mac. Ad DC 100mA  
 Housing: Thermoplastic UL94V-0  
 Contacts: Copper Alloy  
 Operating Temp: -40°C to +105°C

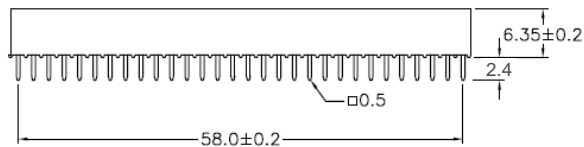

P.C. Board Layout

Series	Type	Positions	Profile	Tail Length	Options
CED	PC104	120	X	X	XX
PCB socket	Type=PC104	120=120 positions	A=6.35 B=9.30	L=2.4mm (A only) M=2.8mm(B only) N=12.1mm (B only) CS=Custom	Blank=Solder tail PF=Pres Fit

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/08/04
				Checked	Lizzy	04/08/04
				Drawn	Tina	04/08/04
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CED-PC104-120-A-M-XX**

Description: PBC Socket 2.0mm x 2.0mm