


SPECIFICATIONS

Current Rating: 3 Amps
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL94V-0
 Standard: Nylon 6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash over all
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20m ohms max.
 Withstanding: AC 500V
 Max Processing Temp: 230C for 60 seconds
 260C for 10 seconds
 Operating Temp: -40C ~ +85C

**Recommended P.C. Board
SMD Layout**

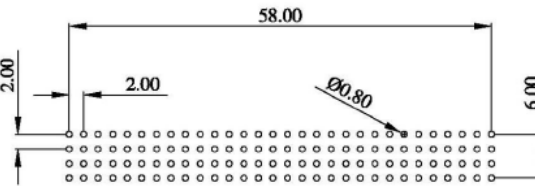

Series	Type	Positions	Profile	Tail Length	Options
CED	PC104	120	X	X	XX
PCB socket	Type=PC104	120=120 positions	A=6.30 B=9.30	L=2.4mm (A only) M=3.0mm(A only) 2.8mm(B only) N=12.1mm (B only) CS=Custom	Blank=Solder tail PF=Pres Fit

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/08/04
				Checked	Lizzy	04/08/04
				Drawn	Tina	04/08/04
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CED-PC104-120-X-X**

Description: 2.0mm PC105 Solder Tail Socket