

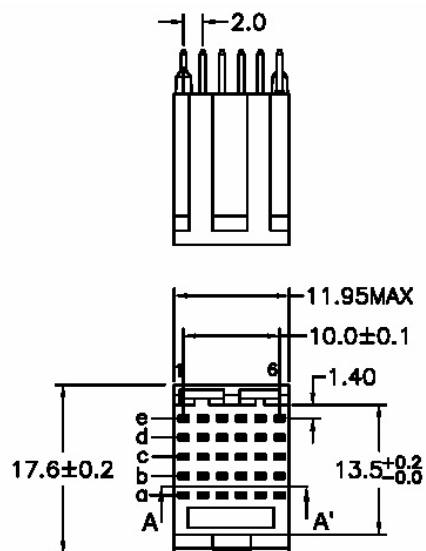


Section A-A'

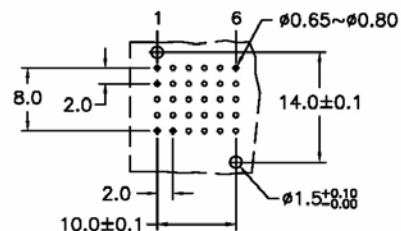

SPECIFICATIONS

Current rating: 1 amp
 Contact material: Brass
 Contact plating: Gold with tin tails
 Housing material: LCP UL94V-0
 Contact resistance: 30 milliohms max. at 100 mA DC
 Insulation resistance: 1,000 megohms min. at 500VDC
 Withstanding: 1,000VAC for 1 min.
 Operating temperature: -65°C to +125°C

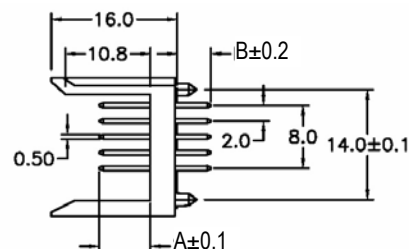

P.C. Board Layout



RoHS compliant

Series	Type	Pin Length A/B	Plating
CFB	5130AC10	X/X	SG
Future bus	5 rows of six pins	[Blank]=5.0/4.3 or custom	SG=Selective gold

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		



Central Components Manufacturing

440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFB-5130AC10-X/X-SG**

Description: Future bus, H.D. male 2.0mm, DIP type, 5 row