

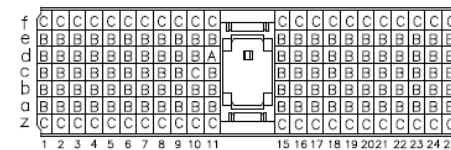

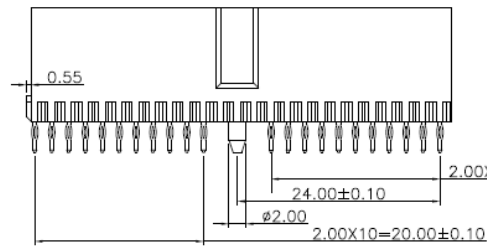


SPECIFICATIONS

Current Rating: 1 Amp
 Withstanding: AC 750V for 1 minute
 Insulator Resistance: 10000MΩ min at DC 500V
 Contact Resistance: 20mΩ max at DC 100mA
 Housing: Thermoplastic Polyester UL94V-0
 Contacts: Copper Alloy
 Operating Temp: -55C to +125C

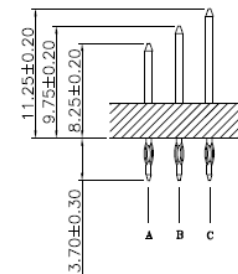

CONTACT LAYOUT

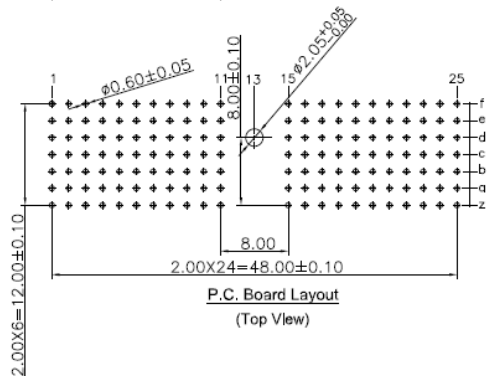

Series	Gender	Rows	Positions	Pin Layout	Contact Plating	Type	Package
CFB	X	X	XXX	X	XGXX	X	XX
Future bus connector	M=Male F=Female	7	154	E	SGXX=Selective Gold (Tin tails) XX=10, 30u" PG30=30u" Palladium Gold (Tin tails)	A	TB=Tube

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/02/12
				Checked	Lizzy	08/02/12
				Drawn	Tina	08/02/12
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFB-M-7-154-E-XGXX-A-TB**

Description: Future bus connector type A