


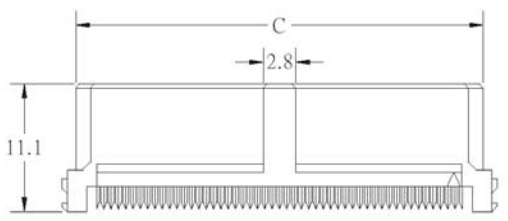


SPECIFICATIONS
 Current Rating: 1 Amp
 Contact Material: Phosphor Bronze
 Contact Resistance: 30mΩ max.
 Insulation Material: PBT, glass reinforced, rated UL94V-0
 Insulation Resistance: 1000MΩ min.
 Withstanding: 250V AC for 1 minute
 Operating Temp: -40°C to +105°C
 For L03-0.635mm pitch flat ribbon cable.



POSITION	A	B	C
10	13.16	5.08	9.96
20	19.51	11.43	16.31
26	23.32	15.24	20.12
30	25.86	17.78	22.66
34	28.40	20.32	25.20
40	32.21	24.13	29.01
50	38.56	30.48	35.36
60	44.91	36.83	41.71
68	49.99	41.91	46.79
80	57.61	49.53	54.41
100	70.31	62.23	67.11

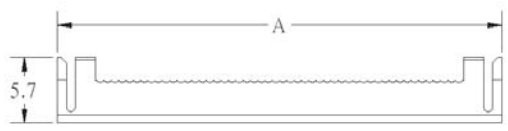

Series	Type	Positions	Polarized	Plating
CFC	T6	XX	P	XX
Flat Cable Socket .05 X .100	Type T6	See Chart	P=Polarized	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank 5, 10, 15, 30u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/20/08
				Checked	Lizzy	06/20/08
				Drawn	Tina	06/20/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFC-T6-XX-P-XX**

Description: Fine Pitch IDC Socket