



$A = (\text{Pos.} \times 0.5) + 4.75$
 $B = (\text{Pos.} - 1) \times 0.5$
 $C = (\text{Pos.} \times 0.5) + 6.0$
 $D = (\text{Pos.} \times 0.5) + 0.6$

SPECIFICATIONS


Voltage rating: 50 volts
 Current rating: 0.4 amps
 Contact material: Copper alloy
 Contact plating: See chart
 Housing material: Thermoplastic
 Slider material: Thermoplastic
 Operating temperature: -55°C to +85°C

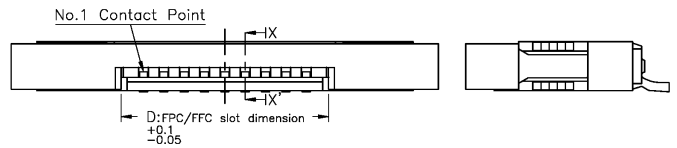

PCB Layout

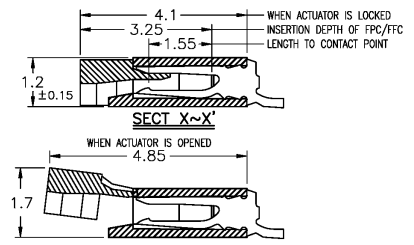


Applicable FPC

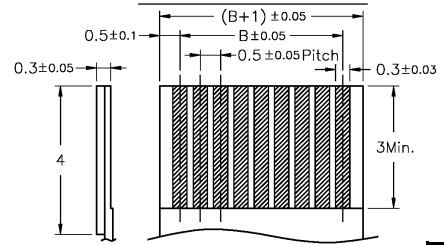

Series	Type	Positions	Plating
CFCC	B	XX	BX
FPC/FFC connector	0.5mm pitch right angle type	4-50	BT=Bottom tin BG1=Bottom 1μ" gold BG3=Bottom 3μ" gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT, PN	12/13/07	Lizzy	Approved	Howard	05/10/04
				Checked	Lizzy	05/10/04
				Drawn	Tina	05/10/04
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		


Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFCC-B-XX-BT**

Description: 0.5mm pitch FPC/FFC connector

