

SPECIFICATIONS


Connector: LC
 Attenuation: 1—30dB
 Return Loss: ≥45dB
 Wavelength: 1310,1550nm
 Attenuation Accuracy: ±0.5dB (under 10 dB)
 ±0.1dB (over 10dB)
 Operating Temp: -40°C to +80°C

FEATURES



- Attenuates continuously and precisely from 1240nm to 1620nm
- High attenuation precision
- Excellent stability and reliability
- Simple manipulation
- High power endurance

APPLICATION

- Long haul telecommunication
- Fiber in the loop (FITL)
- Local area networks (LAN)
- CATV networks
- Network testing

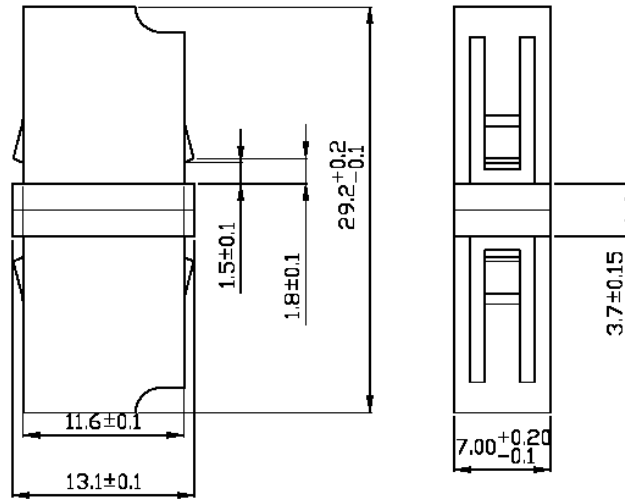

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date	 Central Components Manufacturing 440 Lincoln Blvd., Middlesex, New Jersey 08846 Phone 732 469-5720 888 288-5152 Fax 732 469-1919
				Approved	Howard	09/24/07	
				Checked	Lizzy	09/24/07	
				Drawn	Tina	09/24/07	
0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'							Part No.: CFO-LC-303
 UNIT: mm							Description: LC Adapter Attenuator