


1 2 3 4 5 6 7 8 9

A

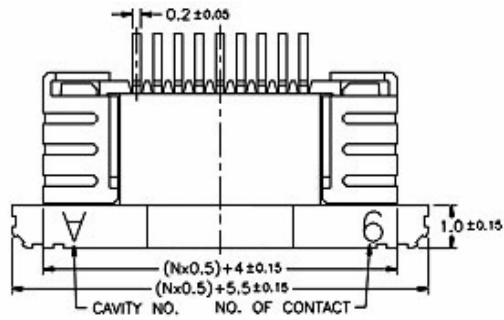

B



SPECIFICATIONS
 Current rating: 0.4 amps max.
 Voltage rating: 50V max.
 Contact material: Phosphor bronze
 Contact plating: Tin
 Insulator material: Glass filled nylon, UL94V-0
 Withstanding: 200V RMS
 No. of contacts: 4-50

C



D

PCB Layout

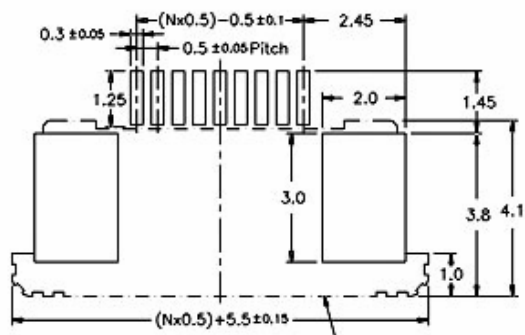

E

RoHS compliant

Series	Pitch	Type	Contacts	Style	Plating	Options
CFPC	050	B	XX	RB	TN	XX
FPC connector	050=0.50mm 030=0.30mm 100=1.00mm 125=1.25mm	B type	04 to 50	R=Right angle V=Vertical U=Upper contacts B=Bottom contacts	TN=Tin over nickel GD1=Gold 1μ" over nickel GD3=Gold 3μ" over nickel	[blank]=None TR=Tape & reel pkg TB=Tube pkg

G

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/10/98
				Checked	Lizzy	09/10/98
				Drawn	Tina	09/10/98
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-050-B-XX-RB-TN-XX**

Description: FPC connector, 0.50mm pitch, ZIF style, right-angle, bottom contacts

1 2 3 4 5 6 7 8 9