
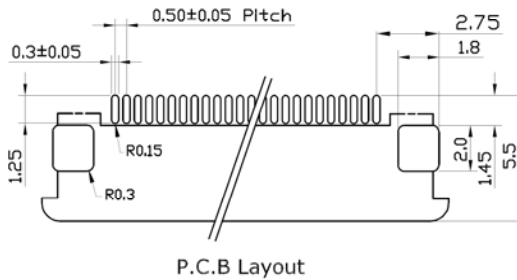
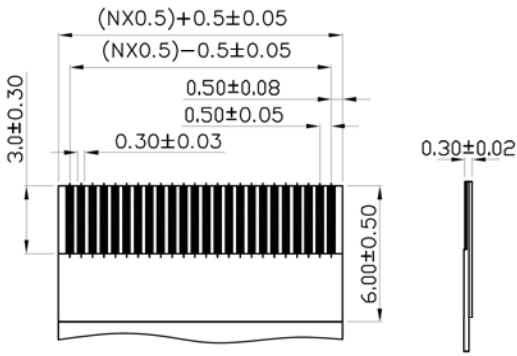


SPECIFICATIONS

Voltage Rating: 50V
 Current Rating: 0.5A
 Housing: Nylon UL94V-0, White
 Cover: Nylon UL94V-0, Black
 Contact: Brass
 Plating: Tin
 Contact Resistance: 20mΩ Max
 Withstanding: 250V AC
 Temperature: -20C ~ +85C

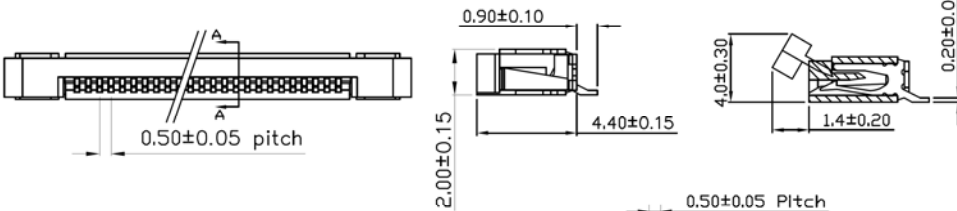

| Dimensions | | | | | | | |
|------------|-------|-------|-------|------|-------|-------|-------|
| Item | A | B | C | Item | A | B | B |
| 4 | 7.90 | 1.50 | 2.50 | 33 | 22.40 | 16.00 | 17.00 |
| 5 | 8.40 | 2.00 | 3.00 | 34 | 22.90 | 16.50 | 17.50 |
| 6 | 8.90 | 2.50 | 3.50 | 35 | 23.40 | 17.00 | 18.00 |
| 7 | 9.40 | 3.00 | 4.00 | 36 | 23.90 | 17.50 | 18.50 |
| 8 | 9.90 | 3.50 | 4.50 | 37 | 24.40 | 18.00 | 19.00 |
| 9 | 10.40 | 4.00 | 5.00 | 38 | 24.90 | 18.50 | 19.50 |
| 10 | 10.90 | 4.50 | 5.50 | 39 | 25.40 | 19.00 | 20.00 |
| 11 | 11.40 | 5.00 | 6.00 | 40 | 25.90 | 19.50 | 20.50 |
| 12 | 11.90 | 5.50 | 6.50 | 41 | 26.40 | 20.00 | 21.00 |
| 13 | 12.40 | 6.00 | 7.00 | 42 | 26.90 | 20.50 | 21.50 |
| 14 | 12.90 | 6.50 | 7.50 | 43 | 27.40 | 21.00 | 22.00 |
| 15 | 13.40 | 7.00 | 8.00 | 44 | 27.90 | 21.50 | 22.50 |
| 16 | 13.90 | 7.50 | 8.50 | 45 | 28.40 | 22.00 | 23.00 |
| 17 | 14.40 | 8.00 | 9.00 | 46 | 28.90 | 22.50 | 23.50 |
| 18 | 14.90 | 8.50 | 9.50 | 47 | 29.40 | 23.00 | 24.00 |
| 19 | 15.40 | 9.00 | 10.00 | 48 | 29.90 | 23.50 | 24.50 |
| 20 | 15.90 | 9.50 | 10.50 | 49 | 30.40 | 24.00 | 25.00 |
| 21 | 16.40 | 10.00 | 11.00 | 50 | 30.90 | 24.50 | 25.50 |
| 22 | 16.90 | 10.50 | 11.50 | 51 | 31.40 | 25.00 | 26.00 |
| 23 | 17.40 | 11.00 | 12.00 | 52 | 31.90 | 25.50 | 26.50 |
| 24 | 17.90 | 11.50 | 12.50 | 53 | 32.40 | 26.00 | 27.00 |
| 25 | 18.40 | 12.00 | 13.00 | 54 | 32.90 | 26.50 | 27.50 |
| 26 | 18.90 | 12.50 | 13.50 | 55 | 33.40 | 27.00 | 28.00 |
| 27 | 19.40 | 13.00 | 14.00 | 56 | 33.90 | 27.50 | 28.50 |
| 28 | 19.90 | 13.50 | 14.50 | 57 | 34.40 | 28.00 | 29.00 |
| 29 | 20.40 | 14.00 | 15.00 | 58 | 34.90 | 28.50 | 29.50 |
| 30 | 20.90 | 14.50 | 15.50 | 59 | 35.40 | 29.00 | 30.00 |
| 31 | 21.40 | 15.00 | 16.00 | 60 | 35.90 | 29.50 | 30.50 |
| 32 | 21.90 | 15.50 | 16.50 | 61 | 36.40 | 30.00 | 31.00 |

| Series | Pitch (mm) | Type | Positions | Style | Plating | Option |
|--|------------|--------------------------------|-----------|---|---|--|
| CFPC | 050 | PG1111Z | XX | XX | XX | XX |
| FPC/FFC connector (Flat Printed Circuit/Flat Flex Cable) Zero insertion Force | 050=0.5 | X:Z=Zero Insertion Force | 04-24 | VX=Vertical RUX=Upper Contact R/A RBX=Bottom Contact R/A RDX=Dual Contact R/A X: S=SMT T=Thru Hole | TN=Tin GDG=Gold X=Flash if blank, 1, 3u" | TR=Tape & Reel TB=Tube C=Pick Cap |

RoHS compliant

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| 1 | | | | Approved | Howard | 05/26/14 |
| | | | | Checked | Lizzy | 05/26/14 |
| | | | | Drawn | Tina | 05/26/14 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-050-PG1111Z-XX-RBS-XX-XX**

Description: FPC/FFC connector, 1mm pitch