


SPECIFICATIONS
 Current Rating: 0.5 Amp
 Contact Material: Copper
 Contact Resistance: 20mΩ max.
 Housing Material: Thermoplastic UL94V-0
 Insulator Resistance: 800MΩ min.
 Actuator Material: Thermoplastic UL94V-0
 Leg Material: Copper
 Withstanding: AC 500V
 Operating Temp: -40C ~ +85C

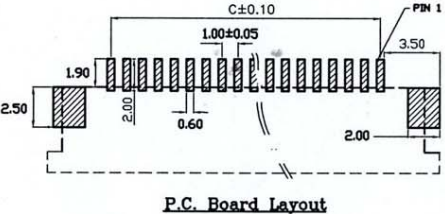

Series	Pitch	Type	Contacts	Style	Plating
CFPC	050	2434	XX	X	XX
FPC connector	100=1.00mm	2434 type	04-32	R=Right angle V=Vertical U=Upper contacts B=Bottom contacts	TN=Tin

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/28/10
				Checked	Lizzy	09/28/10
				Drawn	Tina	09/28/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-100-2434-XX-RB-TN**

Description: FFC/FPC Connector 1.0mm ZIF Type