

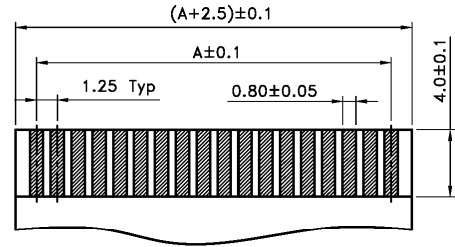



Recommended PCB Layout(Top View)



Applicable FPC/FFC Thickness 0.30±0.05

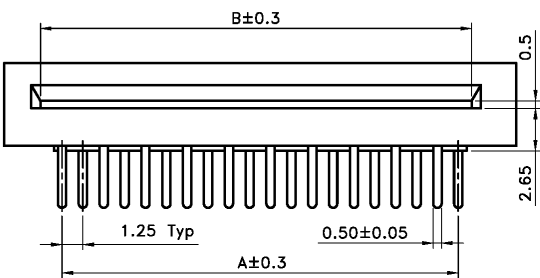

When Slider is opened

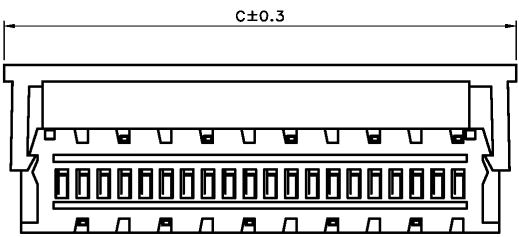

SPECIFICATIONS
 Voltage Rating: 200V AC/DC
 Current Rating: 1A AC/DC
 Contact Material: Phosphor Bronze, Tin Plated
 Contact Resistance: 20mΩ max
 Insulator: PBT UL94V-0
 Insulation Resistance: 500MΩ min
 Withstanding: 500V AC/minute
 Temperature Range: -20°C to +80°C

Series	Type	Positions	Plating
CFPC	1155R	XX	TN
.100 FFC/FFC Connector	1155R=Side Entry 1155=Top Entry	03-32	TN=Tin

Dimensions			
Poles	A	B	C
3	2.50	5.32	9.45
4	3.75	6.57	10.70
5	5.00	7.82	11.95
6	6.25	9.07	13.20
7	7.50	10.32	14.45
8	8.75	11.57	15.70
9	10.00	12.82	16.95
10	11.25	14.07	18.20
11	12.50	15.32	19.45
12	13.75	16.57	20.70
13	15.00	17.82	21.95
14	16.25	19.07	23.20
15	17.50	20.32	24.45
16	18.75	21.57	25.70
17	20.00	22.82	26.95
18	21.25	24.07	28.20
19	22.50	25.32	29.45
20	23.75	26.57	30.70
21	25.00	27.82	31.95
22	26.25	29.07	33.20
23	27.50	30.32	34.45
24	28.75	31.57	35.70
25	30.00	32.82	36.95
26	31.25	34.07	38.20
27	32.50	35.32	39.45
28	33.75	36.57	40.70
29	35.00	37.82	41.95
30	36.25	39.07	43.20
31	37.50	40.32	44.45
32	38.75	41.57	45.70

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	1/06/09
				Checked	Lizzy	1/06/09
				Drawn	Tina	1/06/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-1155R-XX-TN**

Description: 2.54mm ZIF Connector Single Beam Contact