
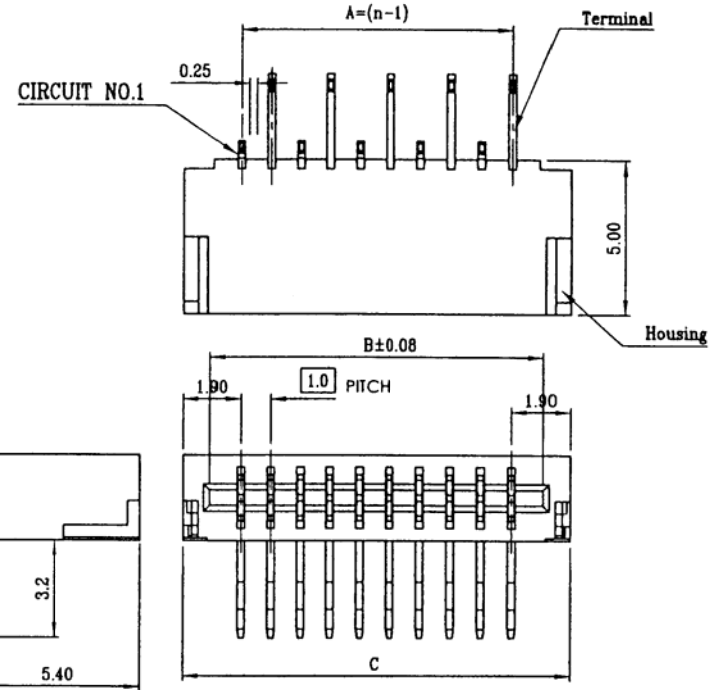


SPECIFICATIONS

Voltage rating: 50VAC/VDC
 Current rating: 0.5 amps
 Contacts: Phosphor bronze
 Contact plating: Tin
 Contact resistance: 20 milliohms max.
 Housing: Nylon
 Insulation resistance: 100 megohms min.
 Withstanding: 500 VAC
 Operating temp: -20°C to +80°C

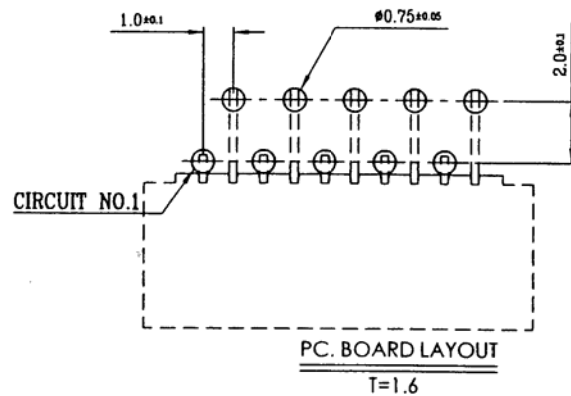

Dimensions																			
Pos.	A	B	C	Pos.	A	B	C	Pos.	A	B	C	Pos.	A	B	C	Pos.	A	B	C
3	2.0	4.10	5.8	11	10.0	12.10	13.8	19	18.0	20.10	21.8	27	26.0	28.10	29.8	35	34.0	36.10	37.8
4	3.0	5.10	6.8	12	11.0	13.10	14.8	20	19.0	21.10	22.8	28	27.0	29.10	30.8	36	35.0	37.10	38.8
5	4.0	6.10	7.8	13	12.0	14.10	15.8	21	20.0	22.10	23.8	29	28.0	30.10	31.8	37	36.0	38.10	39.8
6	5.0	7.10	8.8	14	13.0	15.10	16.8	22	21.0	23.10	24.8	30	29.0	31.10	32.8	38	37.0	39.10	40.8
7	6.0	8.10	9.8	15	14.0	16.10	17.8	23	22.0	24.10	25.8	31	30.0	32.10	33.8	39	38.0	40.10	41.8
8	7.0	9.10	10.8	16	15.0	17.10	18.8	24	23.0	25.10	26.8	32	31.0	33.10	34.8	40	39.0	41.10	42.8
9	8.0	10.10	11.8	17	16.0	18.10	19.8	25	24.0	26.10	27.8	33	32.0	34.10	35.8				
10	9.0	11.10	12.8	18	17.0	19.10	20.8	26	25.0	27.10	28.8	34	33.0	35.10	36.8				

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CFPC-DSE-XX-TN1**

Description: Flexible PCB connector, 1mm pitch R/A, thru hole, non ZIF