

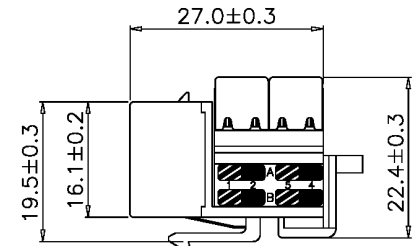


KRONE 45-110 DUAL IDC

SCALE 1/1



SPECIFICATIONS

Jack Housing: ABS+PC, UL94V-0, Optional Color
 Jack Bracket: PC, UL94V-2, Transparent
 Contact Material: Phosphor Bronze, Gold Over Nickel Plating
 IDC Housing Material: PC+5%GF, UL94V-2
 IDC Terminal: Phosphor Bronze, Tin Plating
 22-26 AWG Stranded & Solid
 IDC Cap: ABS, UL94V-0
 IDC Bracket: ABS, UL94V-0
 Jack Bracket Set: PBT+15%GF, UL94V-0
 Wiring: T568A & T568B
 Insertion Force: 900 gm for 8 Contacts
 Retention Strength: 7.7 kg between Jack and Plug
 Durability: 750 cycles
 Operating Temp: -10°C to 60°C

Series	Position	Contacts	Type	Color	Plating
CKJ	8	08	8BCE	XX	P3
Keystone Jack	8=8 Positions	08=8 Contacts	Cat 5 Unshielded	BK=Black RD=Red GY=Grey WT=White YL=Yellow BL=Blue GN=Green OR=Orange PL=Purple IV=Ivory	P3=50u" Gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/25/09
				Checked	Lizzy	06/25/09
				Drawn	Tina	06/25/09
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CKJ-8-08-8BCE-XX-P3**

Description: Cat 5 Unshielded Keystone Jack