


P1	Color	P2
1	White	1
2	Black	2
3	Red	3
4	Green	4
5	Yellow	5
6	Blue	6


**SPECIFICATIONS**

Current rating: 1.5 milliamps  
 Contact resistance: 20 milliohms max.  
 Insulation resistance: 10 megohms min.  
 Housing material: ABS HB standard, ivory  
 Insert material: ABS HB standard, ivory  
 Contact material: Phosphor bronze, ø0.46mm  
 Contact plating: Gold  
 Wire: UL1061, E41396, AWM80°C, VW-1, 300V, 26AWG

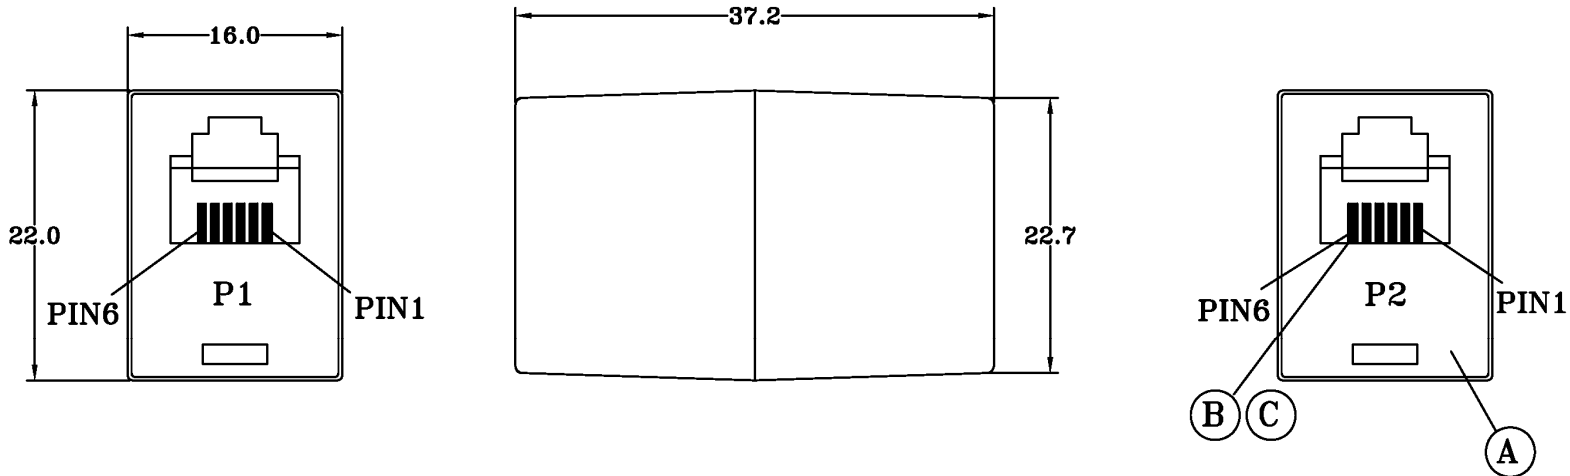

Series	Size	Contacts	Color	Plating	Options
CLC	X	0X	XX	XX	XX
Modular coupler	4, 6, 8	02, 04, 06, 08	BK=Black WT=White	P1=15µ" gold P2=30µ" gold P3=50µ" gold	[blank]=None KY=Keyed R=Reverse wired

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				 UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CLC-6-06-XX-PX**

Description: Modular coupler, 8P8C