


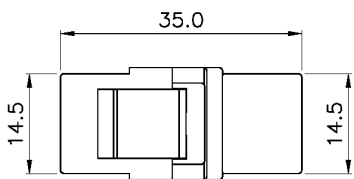


SCALE 1/1

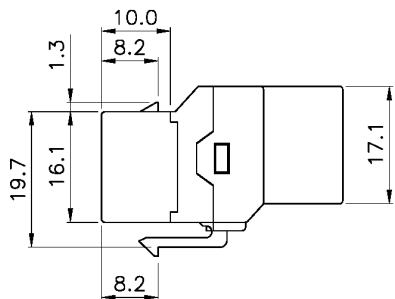

SPECIFICATIONS

Housing Material: ABS + PC, UL94V-0
 Jack Bracket Material: Polycarbonate, UI94-HB, Transparent
 RJ45 Jack Material: Phosphor Bronze, Nickel Plated
 Contact Area—Gold Plated
 Insertion Force: 900 gms for 8 contacts
 Retention Strength: 7.7 kgs between jack and plug
 Durability Jack: 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max.
 Operating Temperature: -40°C to 80°C

Series	Positions	Contacts	Type	Color	Plating	Options
CLC	X	XX	KJ9A	XX	XX	XX
Mini Inline Coupler	4=4 Positions 6=6 Positions 8=8 Positions	02=2 positions 04=4 positions 06=6 positions 08=8 positions	KJ9A type	BK=Black WT=White	P1=15µ" gold plate P2=30µ" gold plate P3=50µ" gold plate	[Blank]=None KY=Keyed S=Shielded 5E=CAT.5e 6=CAT.6

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/11/08
				Checked	Lizzy	09/11/08
				Drawn	Tina	09/11/08

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CLC-8-08-KJ9A-XX-P3-5E**

0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
UNIT: mm		

