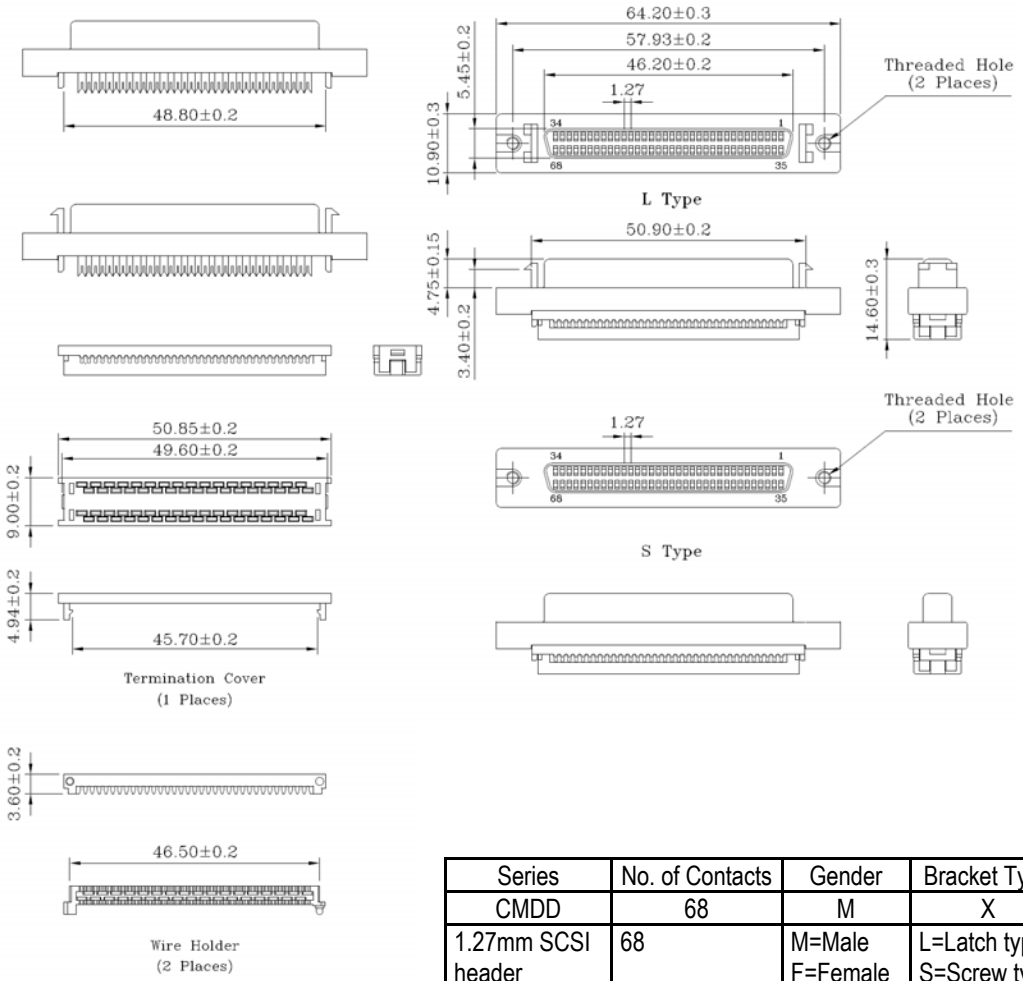

SPECIFICATIONS

Current Rating:	0.5 Amp
Withstanding:	500V AC
Insulation Resistance:	>500MΩ/min
Contact Resistance:	35mΩ/Max
Housing and Cover:	Plastic Thermoplastic PBT UL94V-0, Black
Contacts:	Phosphor Bronze Selective Gold Plating
Bracket:	Zinc Alloy Nickel Plated Over Copper
Operating Temp:	-55C ~ +85C

RoHS compliant

Series	No. of Contacts	Gender	Bracket Type	Thread Size	Wire Holder	Contact Plating
CMDD	68	M	X	X	X	SGXX
1.27mm SCSI header	68	M=Male F=Female	L=Latch type S=Screw type	1=#2-56 2=#4-40 3=M2.6	6=0.62mm 7=0.75mm 8=0.80mm 9=0.90mm	SGXX=Selective Gold XX=Flash if Blank, 5,15,30u”

Rev.	Description	Date	Approved

Drawing	Name	Date
Approved	Howard	04/02/07
Checked	Lizzy	04/02/07
Drawn	Tina	04/02/07

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3’

UNIT: mm

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: CMDD-68-F-L-2-X-SGXX

Description: 1.27mm SCSI header, male