

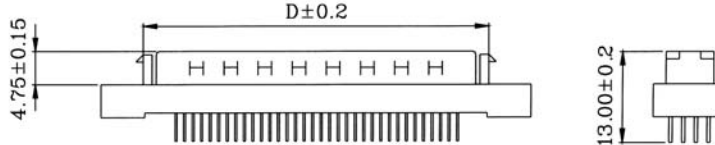



S Type

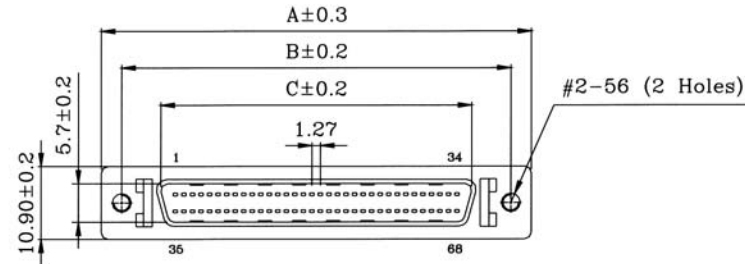

L Type

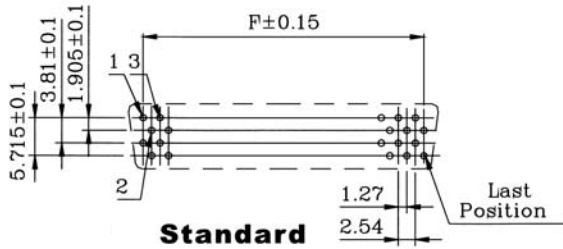

Standard PCB LAYOUT

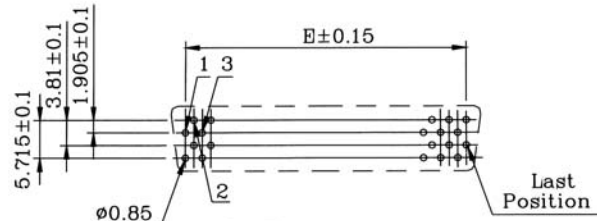

Reverse PCB LAYOUT

SPECIFICATIONS

- Current rating: 1 amp
- Contact material: Copper alloy
- Contact plating: Selective gold
- Contact resistance: 35 milliohms max.
- Insulation resistance: 500 megohms min.
- Withstanding: 500VAC for 1 min.
- Housing material: PBT, UL94V-0, black
- Bracket material: Die-cast zinc
- Bracket plating: Nickel over copper
- Front shell material: Steel
- Front shell plating: Nickel over copper
- Operating temperature: -55°C to +105°C

Dimensions					
Contacts	A	B	C	D	E
26	37.20	31.20	19.35	24.70	15.24
36	43.50	37.60	25.70	31.00	21.59
50	52.60	46.80	34.60	40.10	30.50
68	64.00	57.90	46.00	50.00	41.90

Series	No. of Contacts	Gender	Bracket Type	Thread Size	Contact Plating	PCB Layout
CMDD	XX	M	X	X	SGXX	X
1.27mm SCSI header	26, 36, 50, 68	M=Male F=Female	L=Latch type S=Screw type	1=#2-56 2=#4-40 3=M2.6	SG5=5µ" gold SG15=15µ" gold SG30=30µ" gold	S=Standard R=Reverse

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	5/6/08	Greg	Approved	Howard	04/02/07
				Checked	Lizzy	04/02/07
				Drawn	Tina	04/02/07
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMDD-68-M-X-X-SGXX-X**

Description: 1.27mm SCSI header, male