

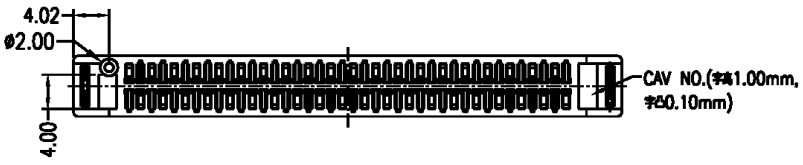


Dimensions					
Pos.	A	B	C	D	E
80	62.15	55.07	51.50	49.53	59.51
68	54.63	47.45	43.88	41.91	51.89

SECT A-A

SPECIFICATIONS

- Current rating: 1 amp
- Contact material: Phosphor bronze
- Contact plating: Gold over nickel on contact area  
Tin on solder tails
- Contact resistance: 35 milliohms max.
- Housing material: PBT with reinforced glass fiber, UL94V-0, black
- Insulation resistance: 500 megohms min. at 500 VDC
- Withstanding: 250VAC for 1 min.
- Temperature: -25°C to +85°C

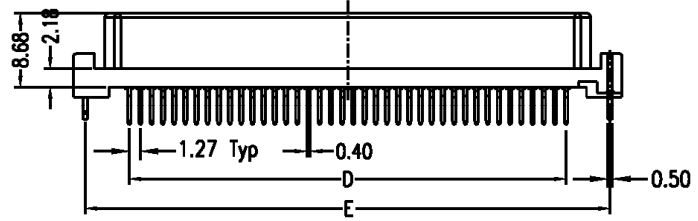

RoHS compliant

Series	Style	Positions	Gender	Plating	Options
MDD	T2	XX	X	SGXX	CP
SCSI2, female, standard type		68, 80	F=Female M=Male	Flash if blank; 5, 10, 15, 30µ" gold	CP=Alignment peg

Rev.	Description	Date	Approved	Drawing	Name	Date
A	PNT	5/6/08	Greg	Approved	Howard	07/14/04
				Checked	Lizzy	07/14/04
				Drawn	Tina	07/14/04
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMDD-T2-XX-F-SGXX-CP**

Description: SCSI2, female, standard type

