


**SPECIFICATIONS**

Voltage rating: 100 VAC, 12 VDC  
 Current rating: 1 amp AC, 2 amps DC  
 Contact material: PBR  
 Contact plating: Silver  
 Contact resistance: 30 milliohms max.  
 Ground terminal: BSR tin plated  
 Body material: PBT with 30% glass fiber  
 Insulation resistance: 50 megohms min. at 250 VDC  
 Withstanding: 250 VAC/1-min.  
 Insertion force: 1-4.5 kg  
 Withdrawal force: 0.8-3.0 kg

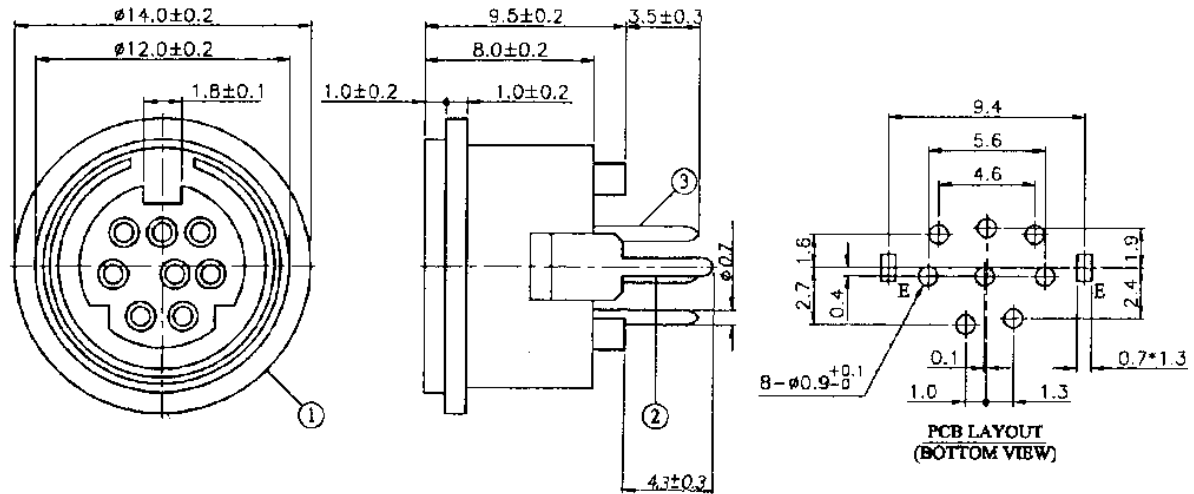

ARRANGEMENT OF CONTACTS						
NO. OF CONTACTS	3	4	5	6	7	8
HOLE LAYOUT						

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
					UNIT: mm	

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMDJ-MDC11-XX-A**

Description: Mini DIN socket, straight type