
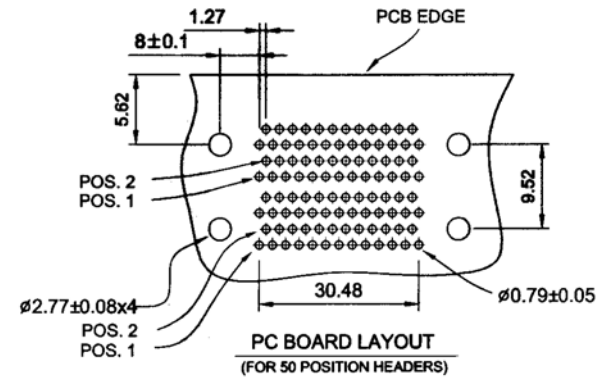



SPECIFICATIONS

Current rating: 1 A
 Contact material: Copper alloy
 Contact resistance: 25 milliohms max.
 Insulator: Thermoplastic, 94V-0
 Insulation resistance: 100 megohms min.
 Shell: Steel, nickel plated
 Bracket: Zinc alloy, nickel plated
 Withstanding: 500 VAC
 Operating temp.: -55°C to +85°C

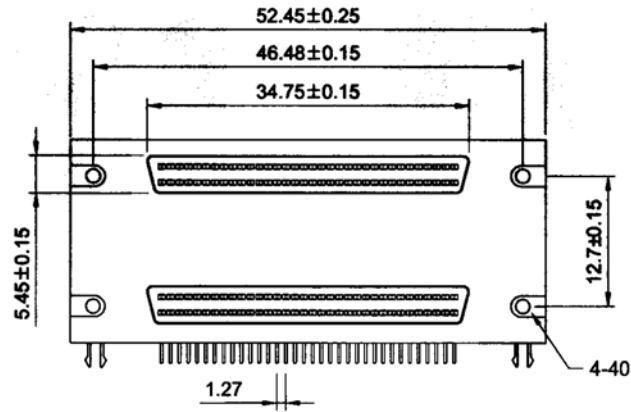

Series	No of Contacts	Gender	Bracket type	Thread Size	Contact Plating
CMDR	XX	FF	S	X	SGXX
1.27mm SCSI right angle header	26, 50, 68, 100	FF=Female over female	L=Latch type S=Screw type	1=#2-56 2=#4-40 3=M2.6	SGX=Selective gold X=5, 15, 30 u" gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	1/02/2007
				Checked	Lizzy	1/02/2007
				Drawn	Tina	1/02/2007
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMDR-26-FF-S-2-SGX**

Description: 1.27mm SCSI header, right angle