





S Type

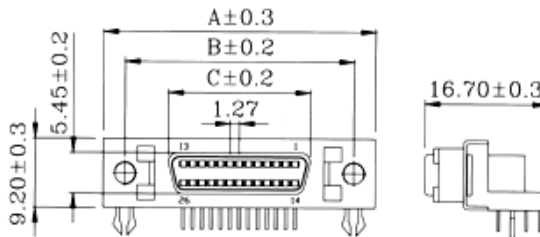

L Type

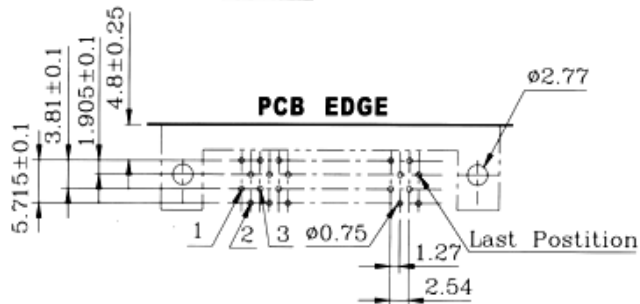

PCB LAYOUT
(68, 100 pos)

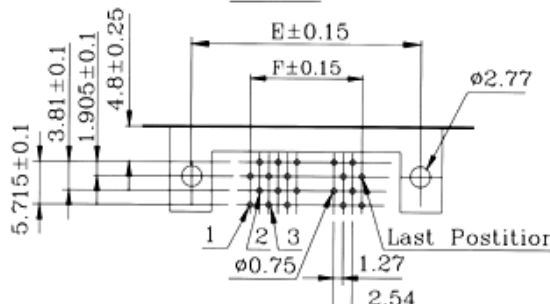

PCB LAYOUT
(26, 50 pos)

SPECIFICATIONS

Current rating: 1 amp
 Contact material: Copper alloy
 Contact plating: Selective gold
 Contact resistance: 35 milliohms max.
 Insulation resistance: 500 megohms min.
 Withstanding: 500VAC for 1 min.
 Housing material: PBT, UL94V-0, black
 Bracket material: Steel
 Bracket plating: Nickel over copper
 Board lock material: Brass
 Board lock plating: Tin over copper
 Operating temperature: -55°C to +105°C

Dimensions						
Contacts	A	B	C	D	E	F
26	37.19	31.26	19.45	24.65	34.20	21.59
50	52.43	46.49	34.70	39.90	46.40	30.48
68	63.86	57.92	46.13	51.32	57.90	41.91
100	84.18	78.23	66.45		78.10	62.23

Series	No. of Contacts	Gender	Bracket Type	Thread Size	Contact Plating
CMDR	XX	F	X	X	SGXX
1.27mm SCSI header	26, 50, 68, 100	F=Female	L=Latch type S=Screw type	1=#2-56 2=#4-40 3=M2.6	SG5=5μ" gold SG15=15μ" gold SG30=30μ" gold

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/25/07
				Checked	Lizzy	04/25/07
				Drawn	Tina	04/25/07

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMDR-XX-F-X-X-SGXX**

Description: 1.27mm SCSI header, female, right angle

0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'
 UNIT: mm