


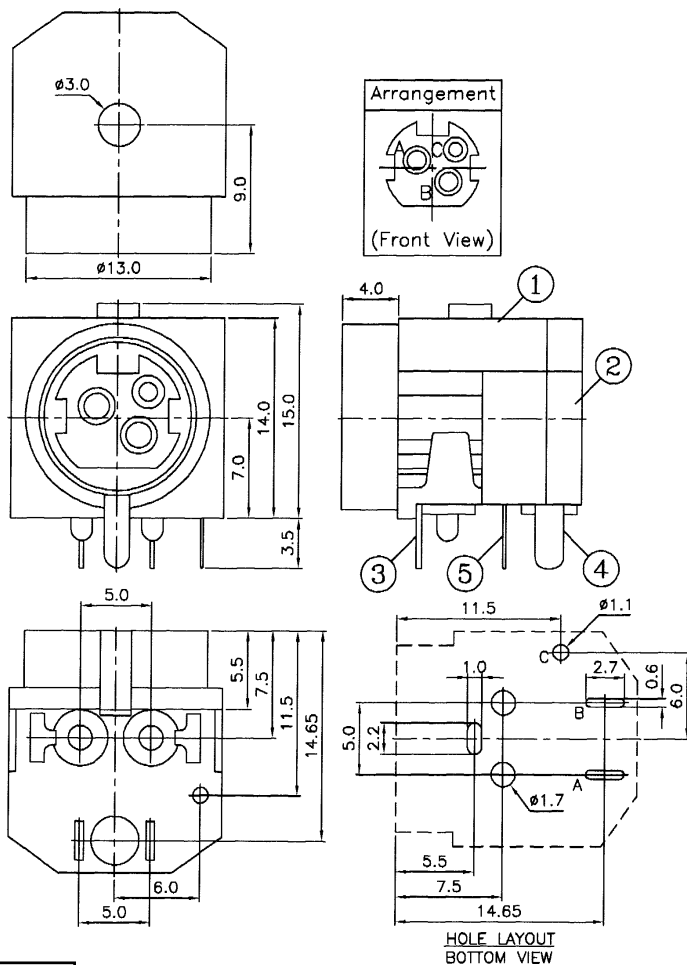

SPECIFICATIONS

Voltage rating:	20VDC
Current rating:	7.5 amps max. pin A & B 1 amp max. pin C
Contact resistance:	60 milliohms max. pin A & B 100 milliohms max. pin C
Insulation resistance:	5 megohms min. at 250 VDC
Withstanding:	250 VRMS/1 min.
Insertion force:	6.0 kg max.
Withdrawal force:	0.5-6.0 kg
Durability:	1,000 cycles min.

Item	Name	Material	Finish
1	Body	PBT UL94V-0	
2	Cover	PBT UL94V-0	
3	Earth terminal	BSR-H 0.4t	Tin
4	Terminal A & B	BSR-H 0.3t	Tin
5	Terminal C	BSR-H 0.2t	Tin

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.:	CMPJ-002
Description:	Miniature power jack, 2 position plus signal