


SPECIFICATIONS

Voltage rating: 20VDC
 Current rating: 7.5 amps max. pin A & B
 1 amp max. pin C
 Contact resistance: 60 milliohms max. pin A & B
 100 milliohms max.
 Insulation resistance: 5 megohms min. at 250 VDC
 Withstanding: 250 VRMS/1 min.
 Insertion force: 6.0 kg max.
 Withdrawal force: 0.5-6.0 kg
 Durability: 1,000 cycles min.

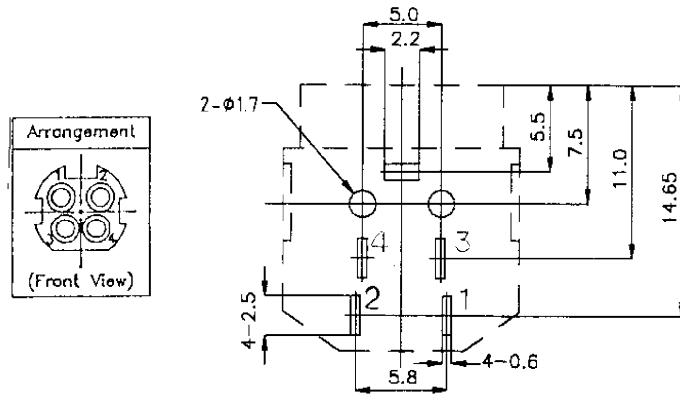

**PCB LAYOUT
TOP VIEW**

Item	Name	Material	Finish
1	Body	PBT UL94V-0	
2	Cover	PBT UL94V-0	
3	Earth terminal	BSR-H 0.4t	Tin
4	Contact Terminal	BSR-H 0.3t	Tin

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMPJ-004**

Description: Miniature power jack, 4 position plus signal