



Closed End Type
Without Polarizing Tabs

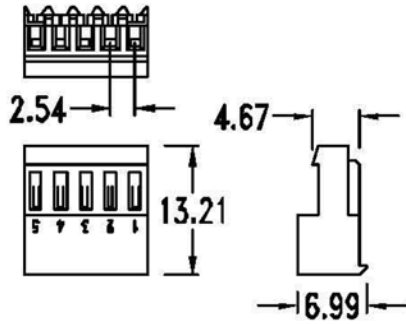


Closed End Type
With Polarizing Tabs

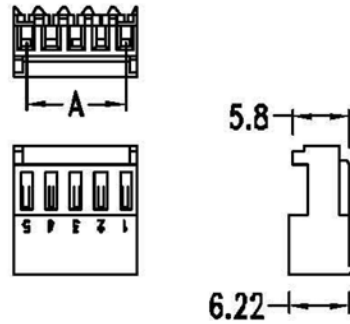


SPECIFICATIONS

Voltage rating: 250VAC max.
 Current rating: 3 amps AC/DC
 Contact Material: Tin, Phosphor Bronze Plating
 Contact resistance: 10 milliohms max. initial
 20 milliohms max. after env. Testing
 Insul. Material: Nylon UL94V-2/0
 Insul. Resistance: 1000 megohms min.
 Withstanding: 1500VAC/min.
 Operating Temp: -40°C to 105°C

Feed-Thru Type
Without Polarizing Tabs

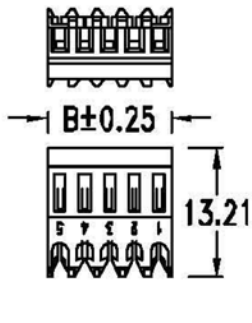

Feed-Thru Type
With Polarizing Tabs

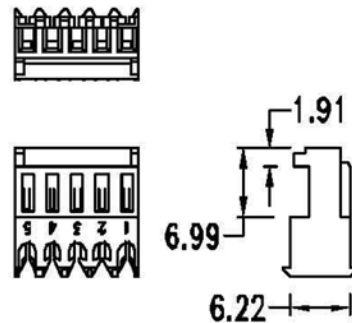

Dimension Information (mm)		
Circuits	A	B
XX	2.54 x (XX-1)	2.54 x (XX)

Color	Wire Size
Red	#22
White	#24
Blue	#26
Green	#28

Series	Type	Wire Size	Positions	Plating	Options
CMT-WM	254	XX	XX	XX	XX
Mass termination connector	396=3.96mm pitch 254=2.54mm Pitch	22,24,26,28	02-24	TN=Tin SGXX=Selective gold XX=Flash if blank, 5,10,15,30	[blank]=Locking ramp NL=No locking ramp P=Polarizing rib S=Feed Through V0=UL94V-0

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMT-WM-254-XX-XX-XX**

Description: Mass termination connector