


NX7.62-1.8
NX7.50-1.8
NX5.08
NX5.00

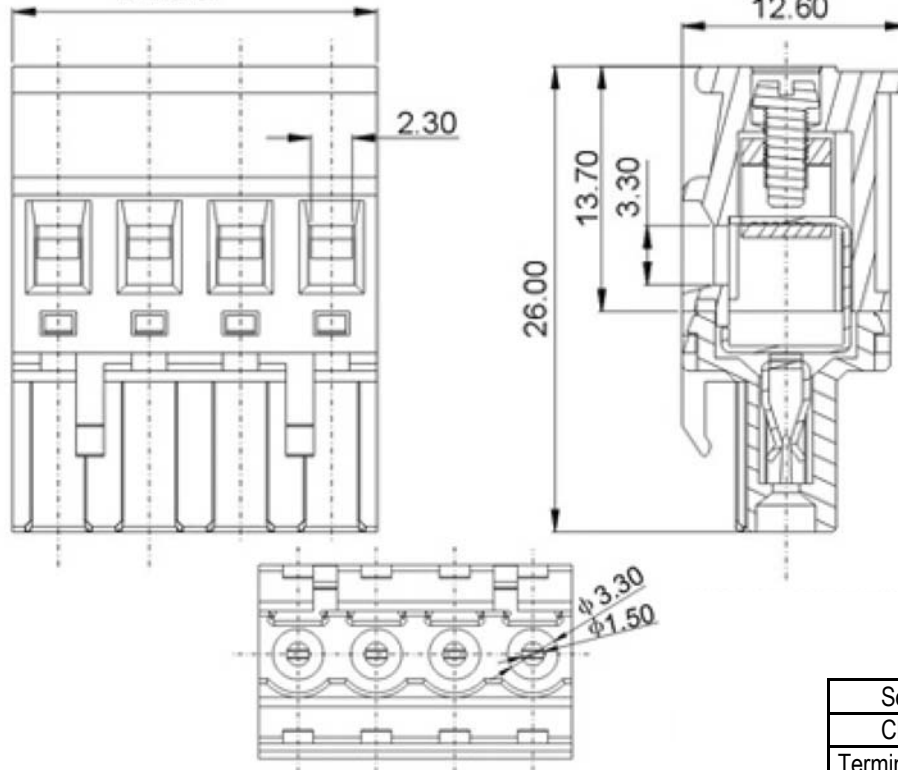

SPECIFICATIONS

Rated Voltage: 300V
Rated Current: 16A
Contact Resistance: 20mΩ
Insulation Resistance: 5000MΩ/1000V
Withstanding: AC1500V/1Min
Wire Range: 28-12AWG
Contact Material: Phosphor Bronze, Tin Plated
Screws: M2.5 Steel Zinc Plated
Housing: PA66, UL94V-0
Max Soldering: +250C for 5 Sec.
Torque: 0.5Nm (4.5Lb, IN)
Strip Length: 7-8mm
Temperature Range: -40°C ~ +105°C

Series	Type	Pitch	Positions	Color
CMTB	F200	XXX	XX	XX
Terminal block	Pluggable, top screw, side entry, hook on entry side.	500=5.00mm 508=5.08mm (.200") 750=7.50mm 762=7.62mm	02, 03, 08, 16	GN=Green (std) BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	06/04/05
				Checked	Lizzy	06/04/05
				Drawn	Tina	06/04/05
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		



Central Components Manufacturing

440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-F200-XXX-XX-XX**

Description: Pluggable terminal block