


SPECIFICATIONS

Rated Voltage: 300V
 Current Rating: 8A
 Contact Resistance: 20mΩ
 Insulation Resistance: 5000MΩ/1000V
 Withstanding: AC 1500V/1Min
 Wire Range: 22-16AWG 1.5mm²
 Wire Guard: Stainless Steel
 Pin Header: Brass, Tin Plated
 Housing: PA66, UL94V-0
 Temperature Range: -40C ~ +120C
 Max Soldering: +250C for 5 sec.
 Strip Length: 8-9mm

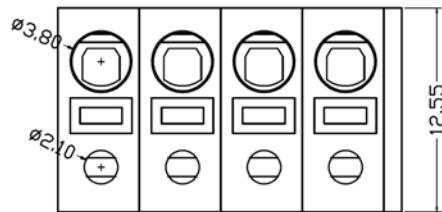

Series	Type	Pitch	Positions	Plating	Color
CMTB	F246X	500	XX	XX	XX
Terminal block	See spec. F246V=Vertical F246R=Right Angle	500=5.00mm	02-20	TN=Tin	BK=Black

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	02/15/10
				Checked	Lizzy	02/15/10
				Drawn	Tina	02/15/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-F246V-500-XX-TN-BK**

Description: Screwless Terminal Block 5.0mm Pitch