



**SPECIFICATIONS**

Voltage Rating: 250V  
 Current Rating: 8A  
 Wire Range: 22-16AWG 1.5mm  
 Housing: PA66 UL94V-0  
 Pitch: 6.0mm  
 Solder Pin: Phosphor Bronze, Tin Plating

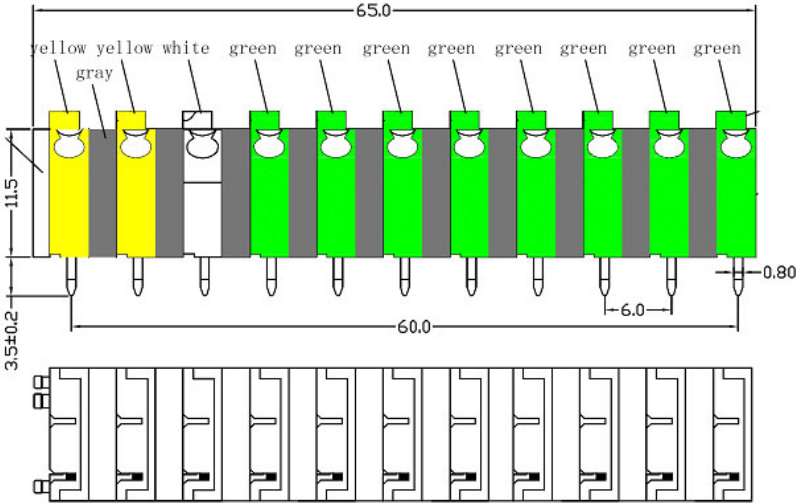

Series	Type	Pitch	Positions	Color
CMTB	F250CM	600	11	XQ
Terminal block	Modular Screwless Front Pins	600=6.00mm (3.5 + 2.5 spacer)	11 pos	C=Cover K=Black A=Gray W=White B=Blue Y=Yellow G=Green S=Spacer Q=Qty

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	04/08/10
				Checked	Lizzy	04/08/10
				Drawn	Tina	04/08/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-F250CM-600-11-CY2WG8(SA)**

Description: 6mm Pitch Screwless Terminal Block