


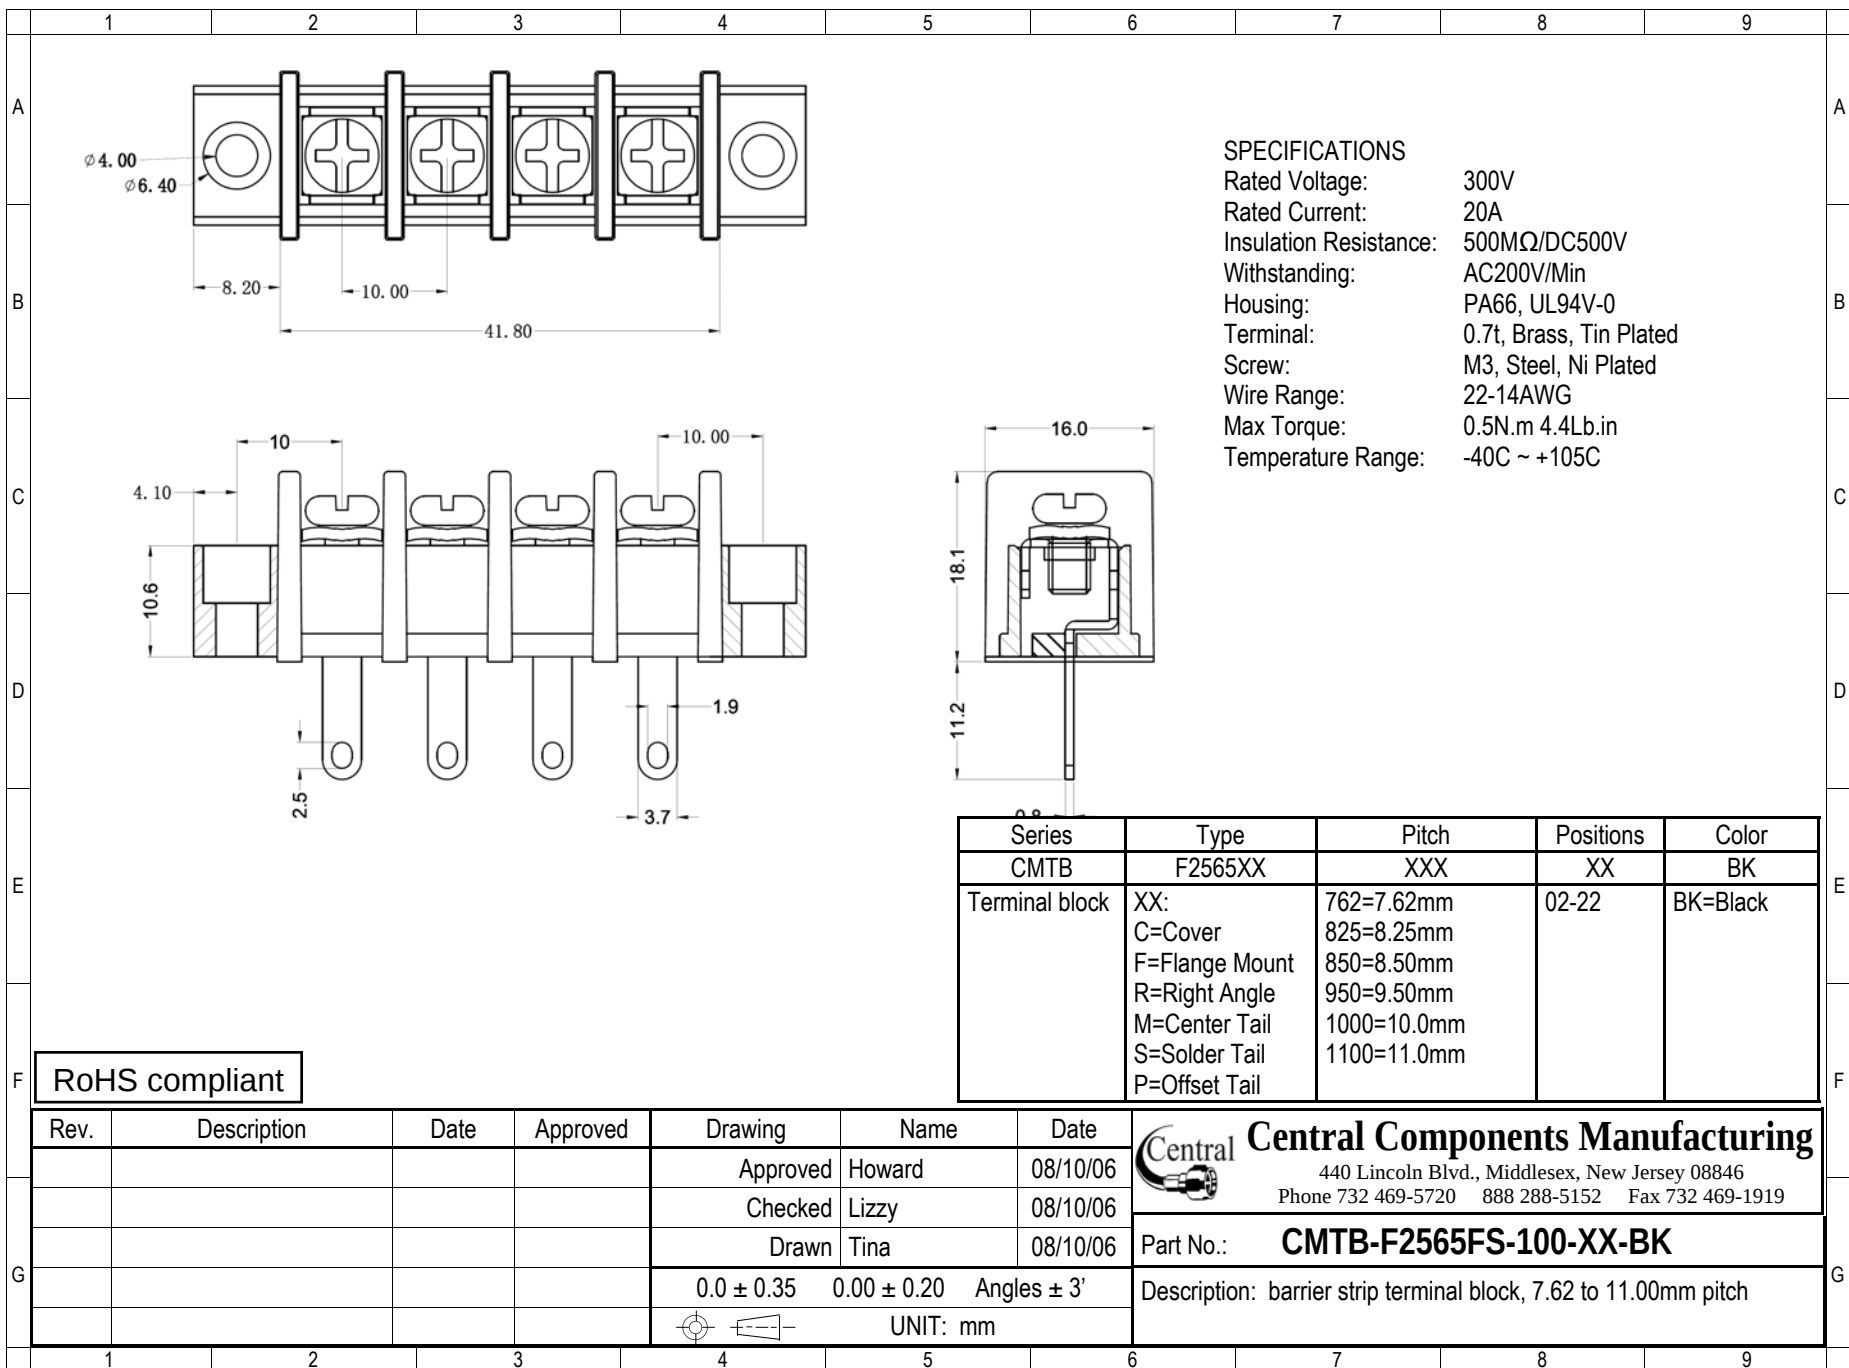

SPECIFICATIONS

Rated Voltage:	300V
Rated Current:	20A
Insulation Resistance:	500MΩ/DC500V
Withstanding:	AC200V/Min
Housing:	PA66, UL94V-0
Terminal:	0.7t, Brass, Tin Plated
Screw:	M3, Steel, Ni Plated
Wire Range:	22-14AWG
Max Torque:	0.5N.m 4.4Lb.in
Temperature Range:	-40C ~ +105C