


SPECIFICATIONS

Voltage Rating: 300V
 Current Rating: 15A
 Contact Resistance: 20mΩ
 Insulation Resistance: 5000MΩ/1000V
 Contact: Brass, Tin Plated
 Housing: PA66, UL94V-0
 Withstanding: AC1500V/1 Min
 Max Soldering: +250C for 5 Sec.
 Tempe Range: -40°C to +105°C

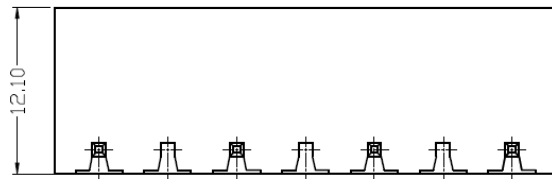

Series	Type	Pitch	Positions	Color
CMTB	F515RC	XXX	XX	GN
Terminal Block	Right angle header closed	500=5.00mm 508=5.08mm 1000=10.00mm 1016=10.16mm	500/508: 02-24 1000/1016: 02-12	GN=Green

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/16/10
				Checked	Lizzy	08/16/10
				Drawn	Tina	08/16/10
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-F515RC-1000-XX-GN**

Description: Terminal Block