


**SPECIFICATIONS**

Current rating: 15 amps  
 Voltage rating: 300VAC  
 Terminals: Brass  
 Terminal plating: Tin  
 Housing material: Thermoplastic, UL94V-0  
 Insulation resistance: 500 megohms min. at 500VDC  
 Screw material: Steel  
 Screw plating: Nickel  
 Withstanding: 2,000VAC  
 Wire range: 14-22 AWG, stranded

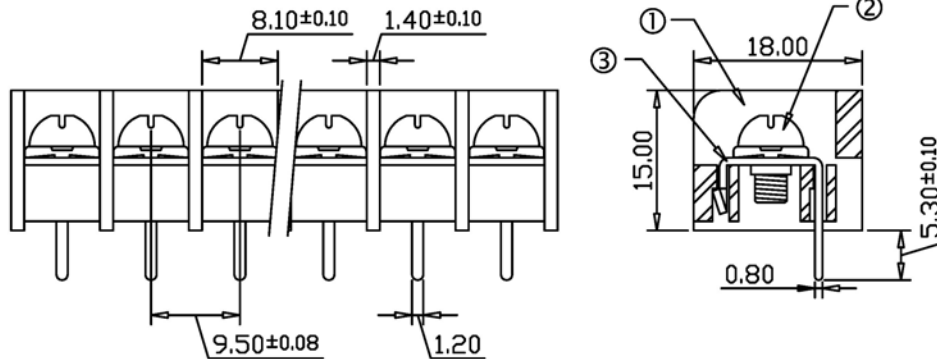

RoHS compliant

Series	Style	Pitch	Positions	Color
CMTB	HB951	950	XX	GN
Terminal block	HB951 style	950=9.5mm pitch	2-32	GN=Green

Rev.	Description	Date	Approved	Drawing	Name	Date
A	DWG	1/05/12	GL	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
						UNIT: mm


**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HB951-950-XX-BK**

Description: Barrier strip