


Dimensions		
Pos.	A	B
2	42.7	33
3	53.7	44
4	64.7	55
5	75.7	66
6	86.7	77
7	97.7	88
8	108.7	99
9	119.7	110
10	130.7	121
11	141.7	132
12	152.7	143
13	163.7	154
14	174.7	165
15	185.7	176
16	196.7	187
17	207.7	198
18	218.7	209
19	229.7	220
20	240.7	231
21	251.7	245.2
22	262.7	253
23	273.7	264
24	284.7	275
25	295.7	286
26	306.7	297

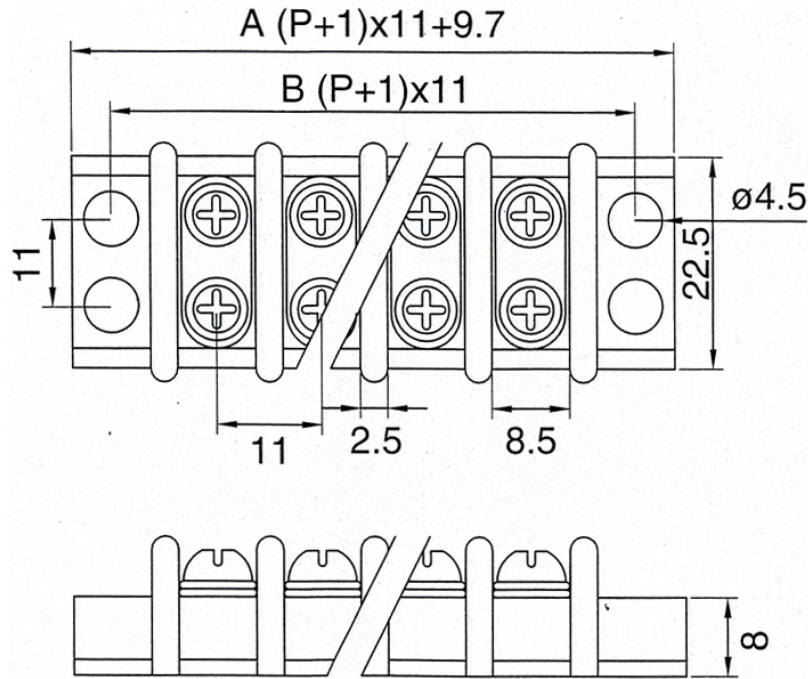

**SPECIFICATIONS**

Current Rating: 20A, 250V  
Terminal Material: Tin Plated Brass  
Screw Material: Nickel Plated Steel  
Body Material: Phenolic, Black  
Insulation Resistance: 1000MΩ DC500V min.  
Withstanding: AC 2000V / MIN  
Wire Range: 12-18 AWG  
Operating Temp: -40°C to +160°C

Series	Type	Pitch	Positions	Color
CMTB	HD20AF	XXX	XX	BK
Terminal Block	Barrier Strip with Mounting Flange Add "C" for Cover (19 Pos. Max)	950=9.5mm 1100=11mm 1400=14mm	02-26	BK=Black

RoHS compliant



Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
440 Lincoln Blvd., Middlesex, New Jersey 08846  
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **CMTB-HD20AFX-XXX-XX-BK**

Description: Barrier Strip with Mounting Flange and Optional Cover